




8-Port Gigabit PoE+ Switch


TPE-TG84 (v1.0R)


- 8 x Gigabit PoE+ ports
- 120W PoE power budget
- 16Gbps switching capacity
- IEEE 802.1p QoS and DSCP pass-through support
- Compact fanless design
- Wall-mountable metal housing

TRENDnet's 8-Port Gigabit PoE+ Switch, model TPE-TG84, reduces equipment and installation costs by delivering data and power over existing Ethernet cables. With PoE technology, users only need one set of cables to deliver both data and power. This compact network switch provides eight gigabit PoE+ ports with a total PoE power budget of 120W. The TPE-TG84 PoE+ switch allows you to network PoE devices, such as wireless access points, IP cameras, VoIP phones, IP video encoders, access controls, and more. It features a fanless design, and has a convenient option for wall mounting.










PoE+ A 120W PoE power budget supports up to eight Power over Ethernet devices.



Compact Design Compact, lightweight, and fanless, this switch is designed for desktops and quiet environments.

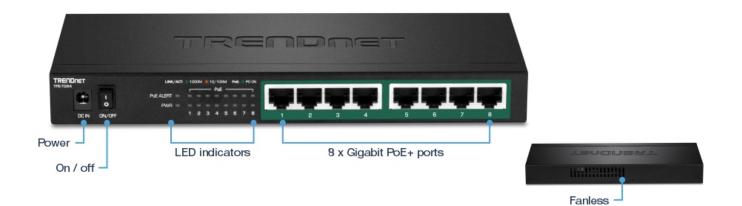

R TRENDNET

FEATURES



PoE+ Supplies up to 30 watts of PoE power per port with a 120W power budget



Switching Capacity 16Gbps switching capacity



LED Indicators LED indicators convey port status

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3x
- IEEE 802.3p
- IEEE 802.3af
- IEEE 802.3at

Device Interface

- 8 x Gigabit PoE+ ports
- LED indicators

Data Transfer Rate

- Ethernet: 10Mbps (half duplex), 20Mbps (full duplex)
- Fast Ethernet: 100Mbps (half duplex), 200Mbps (full duplex)
- Gigabit Ethernet: 2000Mbps (full duplex)



Gigabit Ports

8 x Gigabit PoE+ Ethernet ports

Jumbo Frame Sends Jumbo Frames (up to 9KB) for increased performance



Compact Design

With a compact and lightweight metal housing design, this switch is wellsuited for desktop installations



Fanless

Fanless design is ideal for quiet environments that require silent operation

Performance

- Switch Fabric: 16Gbps
- RAM Buffer: 192KB
- MAC Address Table: 4K entries
- Jumbo Frames: 9KB
- Forwarding rate: 11.9Mpps (64-byte packet size)

Special Features

- · 802.1p Class of Service (CoS)
- Wall mountable

Power

- Input: 100 240 V AC, 50/60Hz, 2.5A
- Output: 55V DC, 2.55A external power adapter
- Max. consumption: 126W

PoE

- PoE budget: 120W
- PoE Mode A: Pins 1,2 for power and pins 3,6 for power

Operating Temperature

• 0° - 40° C (32° - 104° F)

Operating Humidity

Max. 90% non-condensing

Dimensions

• 240 x 105 x 27mm (9.45 x 4.13 x 1.1 in.)

Weight

• 580g (20.45 oz.)

Certifications

- CE
- FCC
- LVD

Warranty

3 year

Package Contents

- TPE-TG84
- Quick Installation Guide
- Power adapter (55V DC, 2.55A)

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.