




## USB 3.0 to Gigabit Ethernet Adapter

TU3-ETG (v3.0R)


- USB 3.0 Type-A connection interface
- Supports 10/100/1000Mbps connection speeds
- Share data, music, movies, and more
- Compact design is ideal for on-the-go users and professionals
- Supports Wake on LAN (Suspend Mode)
- Supports Windows®, macOS®, and Nintendo Switch™

TRENDnet's USB 3.0 to Gigabit Ethernet Adapter, model TU3-ETG, is equipped with a 1000BASE-T RJ-45 port that provides gigabit speeds capable of up to 1Gbps over existing network cabling. This USB Gigabit adapter features a USB-A interface that easily connects to either a USB enabled notebook, desktop computer, or Nintendo Switch™ for high-speed network connectivity. The low-profile compact design is ideal for on-the-go users and professionals.



### USB 3.0

Use the USB 3.0 Ethernet adapter to easily connect to a gigabit network from a USB Type-A 3.0 enabled notebook.



### Gigabit Speeds


Experience Full Duplex 2Gbps Ethernet speeds with this compact USB to gigabit Ethernet adapter.



### Compatibility

The USB gigabit adapter is compatible with Windows<sup>®</sup> and macOS<sup>®</sup> operating systems, and Nintendo Switch<sup>™</sup>.

## NETWORKING SOLUTION

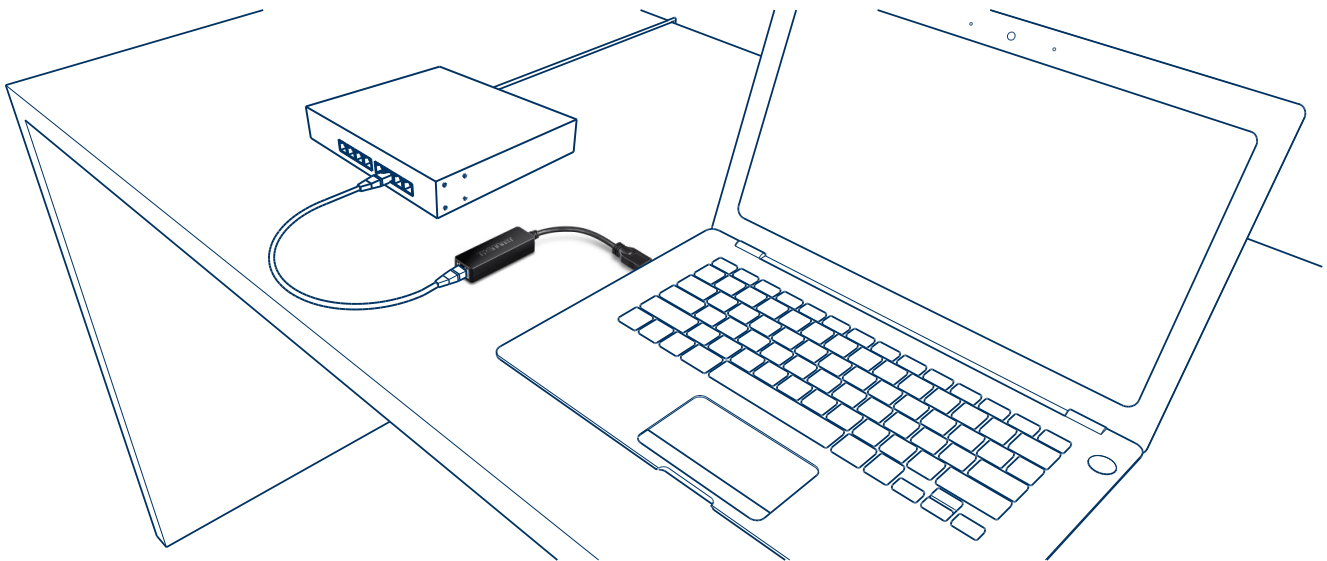

## FEATURES

**1** **Easy Setup**  
**2** **3** Simple installation in minutes

**Compact Design**  
 The low-profile compact design is ideal for on-the-go user and professionals.

**Integrated Cable**  
 Features integrated 12.7cm (5 in.) USB 3.0 (Type-A) cable

**USB Powered**  
 The USB Ethernet adapter is powered via the USB port



## SPECIFICATIONS

### Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab
- IEEE 802.3az
- USB 1.1
- USB 2.0
- USB 3.0

### Device Interface

- 1 x Gigabit Ethernet port
- 1 x USB 3.0 Type A port (Male)

### Maximum Data Rate

- Up to 2Gbps (Gigabit Port)

### Special Features

- Energy saving technology
- Wake on LAN (suspend mode)

### Compatibility

- Windows® 11, 10, 8.1, 7
- MacOS® 10.6 – 10.15, 11, 12
- Nintendo Switch™

### Power

- USB powered
- Max. Consumption 0.95W

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90% non-condensing

### Dimensions

- 73 x 24 x 14mm (2.8 x 1 x 0.6 in.)
- 130mm (5 in.) cable length

### Weight

- 25g (0.9 oz.)

### Certifications

- CE
- FCC

### Warranty

- 2 year

### Package Contents

- TU3-ETG
- Quick Installation Guide

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.