



Powered by an ENERGY STAR® qualified adapter for a better environment

SecurView Wireless Internet Camera TV-IP110W (A1.0R)

The Wireless Internet Camera Server (TV-IP110W) transmits real-time high quality video over the Internet. View your camera from any Internet connection. Complimentary SecurView camera management software provides advanced monitoring of up to 16 cameras to protect what you value most.

This stylish and compact Internet camera provides crystal clear MJPEG video streams.

Mount the wireless camera on most surfaces with an included mounting kit. Intuitive software features motion detection recording, email alerts*, and scheduled recordings. The camera's brilliant image quality, intuitive setup and complimentary software make it ideal for your home or office.

FEATURES

- Quick Plug and Play installation
 - Supports TCP/IP networking, SMTP Email*, HTTP
 - High quality MJPEG video recording with up to 30 frames per second
 - Record streaming video to your computer
 - Compatible with wireless g and b devices
 - Advanced encryption mode include WEP, WPA-PSK(TKIP), WPA2-PSK
 - Supports still image snapshot to FTP and Email
 - Motion detection with Email notification*
 - Control two adjustable motion detection windows with just-in-time snapshot
 - Supports time stamp overlay
 - Free SecurView™ software: view and record up to 16 cameras simultaneously **
 - 3-year limited warranty
- * Monitoring multiple cameras may require a high performance CPU and graphics card
- * Does not support SSL
- ** Monitoring multiple cameras may require a high performance CPU and graphics card.

SecurView Wireless Internet Camera

TV-IP110W

SPECIFICATIONS

Image Sensor	
Sensor	• 1/4" Color CMOS Sensor
Resolution	• 640 x 480 pixel
Fixed Lens	• f: 4.6mm, F: 2.6 (Board Lens)
Viewing Angle	• 60 Degree
Minimum Illumination	• 0.5Lux
Video/Image	
Video Format	• MJPEG
Image Frame Rate	• 30fps @VGA, QVGA, QQVGA
Frame Rate Setting	• 1 ~ 30fps
Zoom	• 3 x Digital Zoom
Compression Ration Setting	• 5 Levels
Resolution	• 640 x 480, 320 x 240, 160 x 120
Exposure Control, White Balance, Gain Control	• Automatic
Image Setting	• Adjustable brightness, saturation & contrast
Flip Images	• Vertical / Horizontal
Light Frequency	• 50Hz, 60Hz or Outdoor
Communication	
LAN	• 10/100Mbps Auto MDIX
Protocol	• HTTP, FTP, TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, PPPoE, UPnP
System	
CPU	• ARM9 base
RAM	• 16Mbyte SDRAM
ROM	• 4Mbyte Nor Flash
OS	• Linux
System Requirement (Web Configuration)	
CPU	• 350MHz or above
Memory Size	• 256MB RAM or above, 512MB RAM or above
Resolution	• 800 x 600 or above
Browser	• Internet Explorer 6.0 or above
Supported OS	• Windows 2000/XP/Vista
System Requirement (SecurView™ Software)	
CPU	• 1GHz or above
Memory Size	• 512MB or above
Resolution	• 1024 X 768 or above
Supported OS	• Windows 2000/XP/Vista




SecurView Wireless Internet Camera TV-IP110W

SPECIFICATIONS

Physical/Environmental	
Dimension	• 70 x 100 x 57mm (2.67 x 3.94 x 2.95 in.)
Weight	• Camera: 125g (4.4oz.); Stand: 135g (4.76oz.)
Power	• 5V DC, 2.5A External Adapter
Power Consumption	• 6 Watts (Max)
LEDs	• Power (Orange), Link (Green) • Enable/Disable Support
Temperature	• Operating: 0°C ~ 45°C (32°F ~ 113°F); Storage : -10°C ~ 60°C (14°F ~ 140°F)
Wireless	
Standard	• IEEE 802.11b/g
Security	• 64/128bit WEP (HEX/ASCII), WPA-PSK(TKIP/AES), WPA2-PSK (TKIP/AES)
Antenna	• 2dBi detachable Reverse SMA Connector

NETWORKING SOLUTIONS

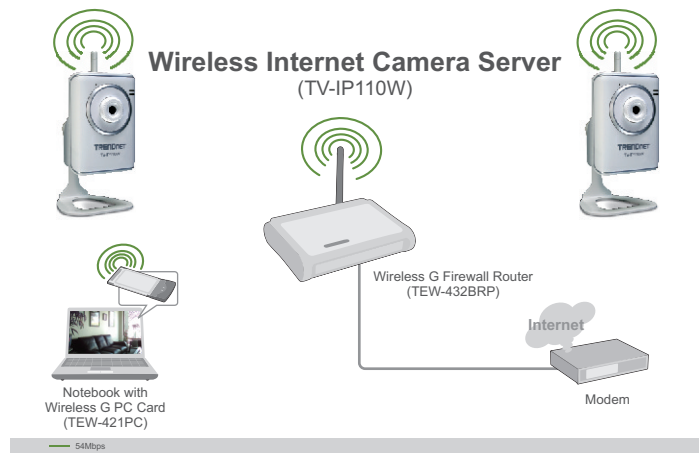

PACKAGE CONTENTS

- TV-IP110W
- Multi-Language Quick Installation Guide
- Utility CD-ROM
- Camera Stand
- 1.8m/5.9ft Cat.5 Fast Ethernet cable
- Power Adapter (5V DC 2.5A)

RELATED PRODUCTS

TV-IP110	SecurView Internet Camera
TV-IP212W	SecurView Wireless Internet Camera
TV-IP312W	SecurView Wireless Day/Night Internet Camera

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061