

# TRENDnet<sup>®</sup>



---

## Quick Installation Guide

### TEG-30102WS (V1)

# Table of Contents

---

## **1 English**

1. Before You Start
2. Hardware Installation and Configuration

# 1. Before You Start

---

## Package Contents

- TEG-30102WS
- Quick Installation Guide
- Power cord
- Rackmount kit


## Minimum Requirements

- Computer with an Ethernet port and web browser
- Network cable

## Optional Equipment

- EIA standard 19" rack
- SFP modules (e.g. TEG-10GBSR, TEG-10GBS10, TEG-10GBS40)

## 2. Hardware Installation and Configuration

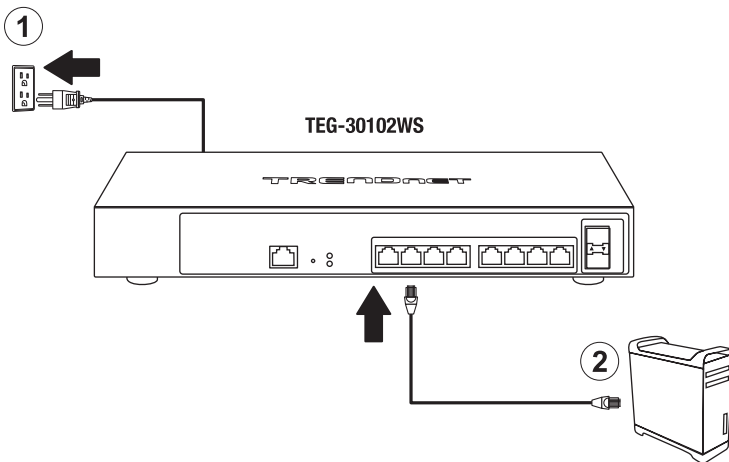

3. Assign a Static IP address to your computer's network adapter in the subnet of 192.168.10.x (e.g. 192.168.10.25) and a subnet mask of 255.255.255.0.
4. Open your web browser, type the IP address of the switch in the address bar, and then press **Enter**. The default IP address is 192.168.10.200.



5. Enter the **User Name** and **Password**, and then click **LOGIN**. By default:

User Name: **admin**

Password: **admin**

User Name: admin

Password: ....

LOGIN

6. Click **System**, click **IPv4**, and click **IP Address**.

System

IPv4

IP Address

IPv4 Address Setup

Interface VLAN : [ ] (1-4094)

Add

IPv4 Address Table				
Interface	IP Address	Subnet Mask	Link Status	Action
VLAN 1	192.168.10.200	255.255.255.0	Up	Modify Delete

Page 1/1 First Page Previous Page Next Page Last Page Page 1/1

7. Under the IPv4 Address Table for VLAN1, click on **Modify** in the Action column.

IPv4 Address Table				
Interface	IP Address	Subnet Mask	Link Status	Action
VLAN 1	192.168.10.200	255.255.255.0	Up	Modify Delete

Modify

8. Configure the switch to meet the IP requirements of your network. Then click **Apply**.

Modify IPv4 Address	
Interface:	VLAN 1
MAC Address:	02:00:C1:23:AD:0F
IP Address:	102 . 168 . 10 . 200
Subnet Mask:	255 . 255 . 255 . 0
System IP Mode:	Static
DHCP Auto Configuration:	Disabled
<input type="button" value="Apply"/>	

Apply


9. Click **Save Settings to Flash**.

Save Settings to Flash

The screenshot shows a configuration menu with the following items: Switch Info, System, Physical Interface, Bridge, SNMP, Access Control Config, RMON, Voice VLAN, Security, PoE Configuration, DHCP Snooping, LLDP, Statistic, Tools, and Save Settings to Flash. The 'Save Settings to Flash' option is highlighted with a callout box. A note below the menu states: 'Note: The switch will stop responding while saving the current configuration to flash.'

Save Settings to Flash

10. Click **OK**.

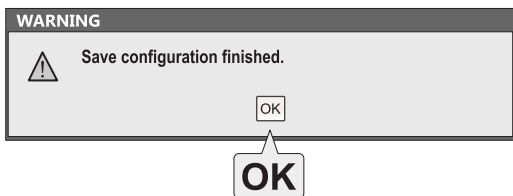

To download the latest version of the user's guide, please go to <http://www.trendnet.com/support> and select the **TEG-30102WS** from the products drop down list.

# Declaration of Conformity

TRENDnet<sup>®</sup>

## Manufacturer's Name and Address

TRENDnet, Inc.  
20675 Manhattan Place  
Torrance, CA 90501 USA

Zwolsestraat 156 2587 WB  
The Hague The Netherlands



## Product Information:

**Model Number:** TEG-30102WS  
**Product Name:** 10-Port 2.5GBASE-T Web Smart+ Switch with 2 x 10G SFP+ Slots  
**Trade Name:** TRENDnet

TRENDnet hereby declare that the product is in compliance with the essential requirements and other relevant provisions under our sole responsibility.

**Safety:** EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013

**EMC:** EN 55032: 2012+ AC: 2013 Class A (CISPR32: 2012)  
EN 55024: 2010  
EN 61000-3-2: 2014  
EN 61000-3-3: 2013  
AS/NZS CISPR 32: 2013

This product is herewith confirmed to comply with the Directives.

**Directives:** Low Voltage Directive 2014/35/EU  
EMC Directive 2014/30/EU  
RoHS Directive 2011/65/EU  
WEEE Directive 2012/19/EU  
REACH Regulation (EC) No. 1907/2006

Person responsible for this declaration.

Place of Issue: Torrance, California, USA

Date: November 22, 2017

Name: Sonny Su

Title: Director of Technology

Signature: \_\_\_\_\_

A handwritten signature in black ink, appearing to read 'Sonny Su', is written over a horizontal line.





# TRENDnet<sup>®</sup>

---

## Certifications

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.

Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.

Applies to PoE Products Only: This product is to be connected only to PoE networks without routing to the outside plant.

## Note

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

## Advertencia

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

## Technical Support

If you have any questions regarding the product installation, please contact our Technical Support.

Toll free US/Canada: **1-866-845-3673**

Regional phone numbers available at [www.trendnet.com/support](http://www.trendnet.com/support)

## TRENDnet

20675 Manhattan Place  
Torrance, CA 90501  
USA

## Product Warranty Registration

Please take a moment to register your product online. Go to TRENDnet's website at: [www.trendnet.com/register](http://www.trendnet.com/register)