




Quick Installation Guide

2-Port Dual Monitor DVI KVM Switch TK-232DV

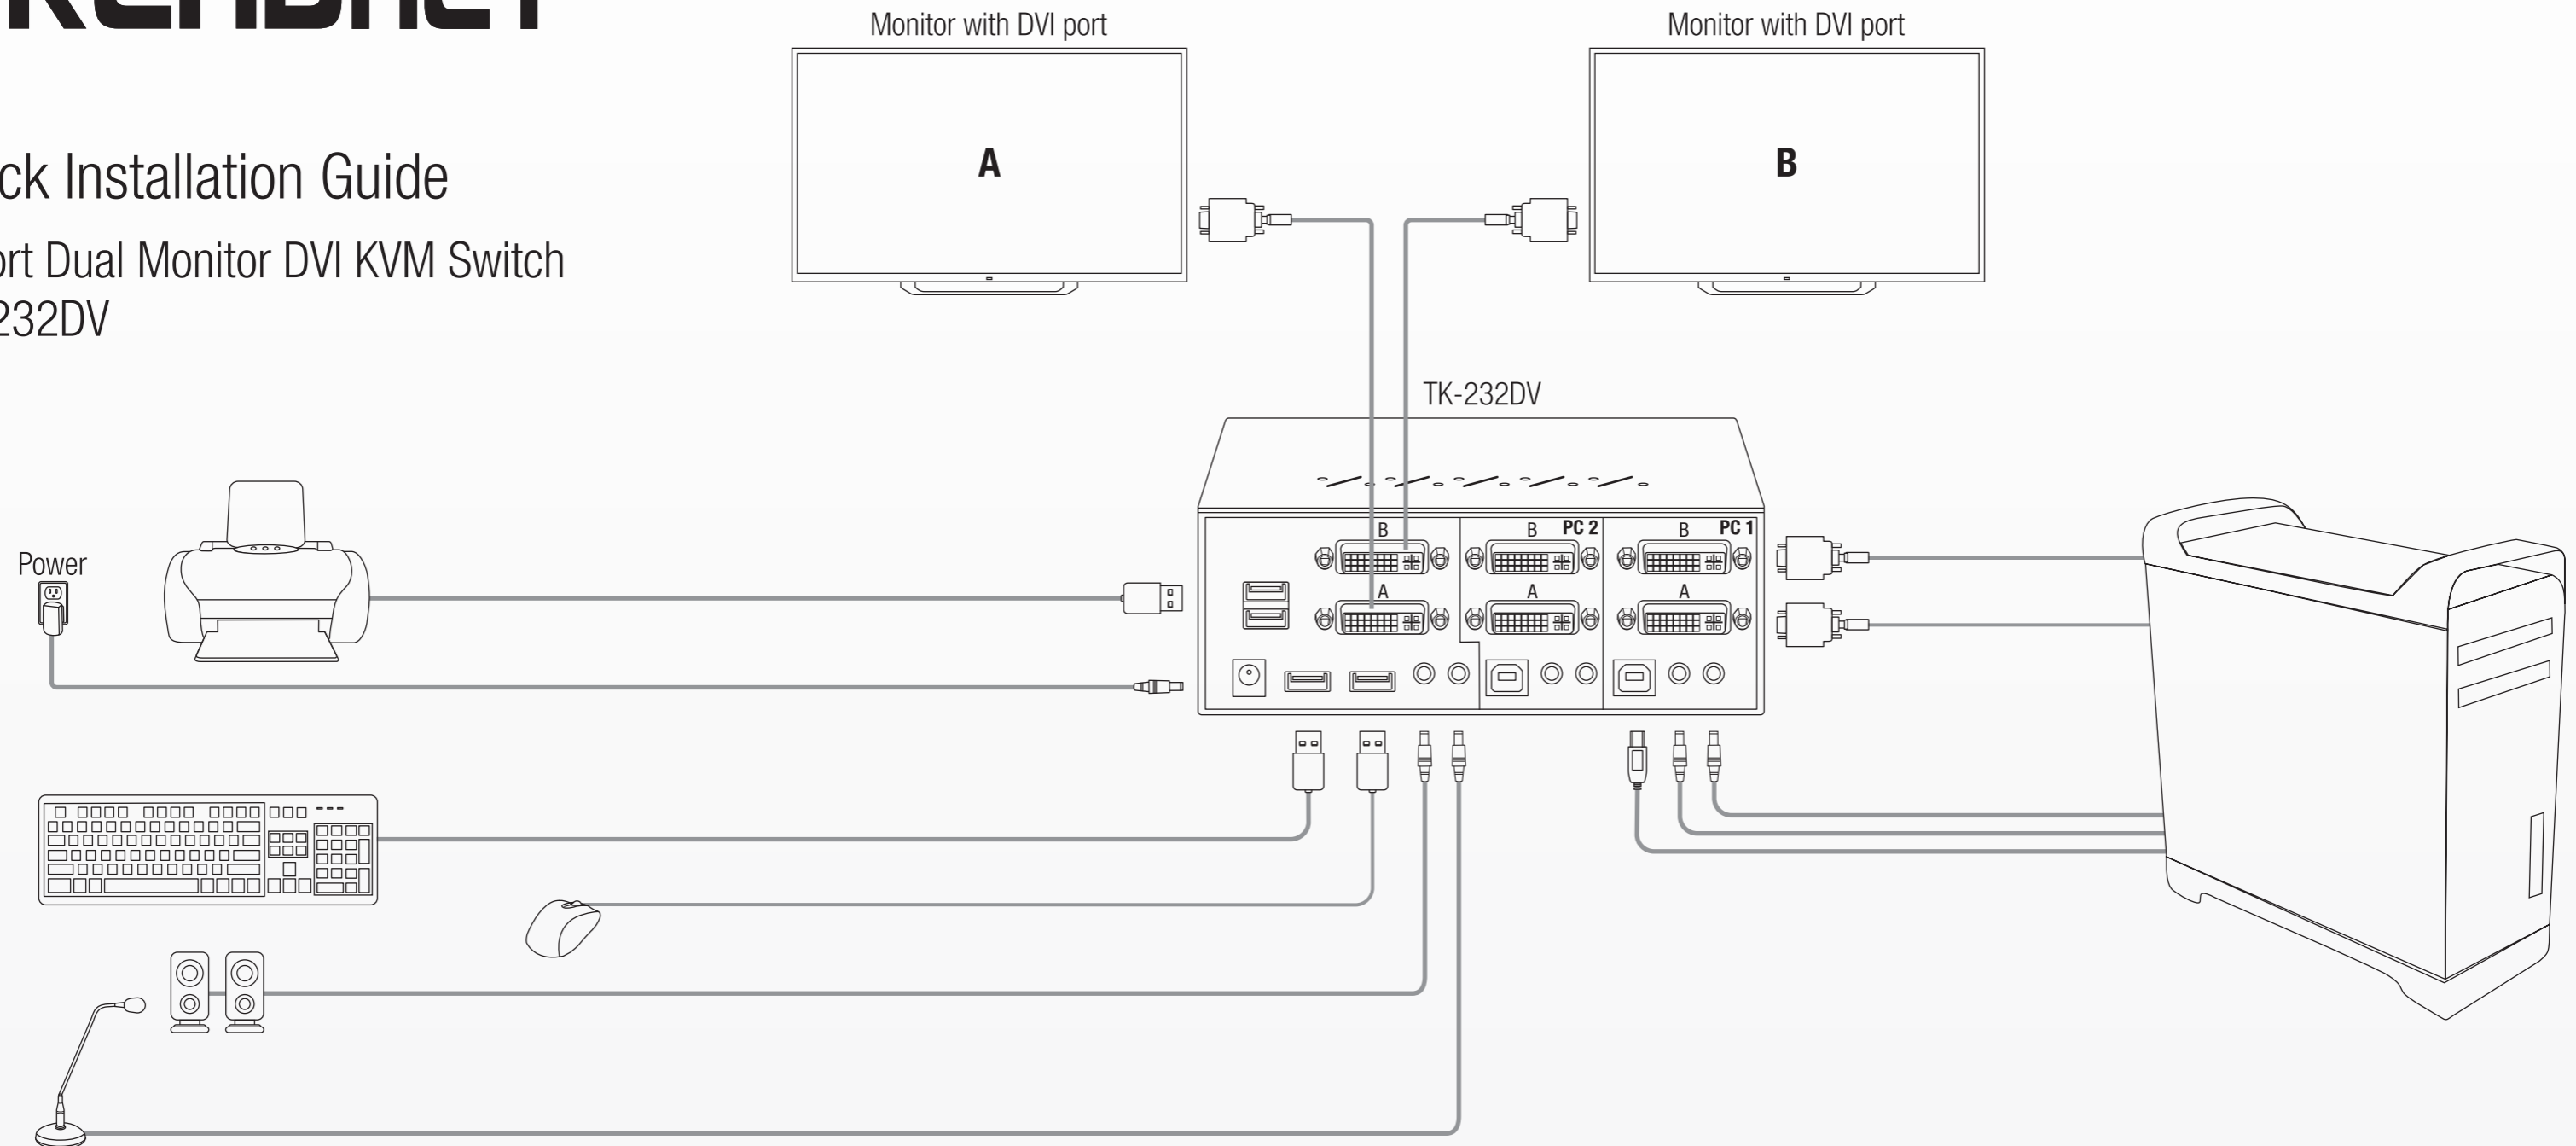

QUICK REFERENCE SHEET

| Dual Monitors DVI USB KVM Switch w/ Audio & Mic – Operation Commands for Hotkeys / Front- Panel Button | | | |
|---|--|--|---|
| Hotkey sequence = [ScrLk]*+ [ScrLk]*+Command Key(s) * User-definable Preceding sequence = SCROLL LOCK, CAPS, ESC, F12 or NUM LOCK | | | |
| Command | Hotkeys ¹ | Front-Panel Button | Description |
| Select PC Port ² (Jointly select PC port/ hub port control/ audio&mic, if binding is enabled) | [ScrLk] + [ScrLk] + [X] x = 1-2/ 1-4 for PC port number | Press the corresponding button to select the active PC port. | Select the active PC port (Jointly select PC port/ hub port control/ audio mic, if binding is enabled) |
| Select Hub Port Control ² (Jointly select PC and hub port control, if binding is enabled) | [ScrLk] + [ScrLk] + [Fxi] Fx = F1-F2/ F1-F4 (Fx is a function key) x = 1-2/ 1-4 for hub port number | Press the button to toggle the specific PC+USB hub port control. (It works only if PC port / hub port control binding is enabled.) | Select the PC port that control all USB hub ports (Jointly select PC & hub port control, if PC / hub port control binding is enabled) |
| Select Audio&Mic Port ³ (Jointly select PC port and audio&mic, if binding is enabled) | [ScrLk] + [ScrLk] + [Fyi] Fy = F5-F6 / F5-F8 (Fy is a function key) y = 5-6/ 5-8 for audio & mic port number | - | Select the active audio&mic port (Jointly select PC & audio&mic port, if binding is enabled) |
| Bind PC and Hub Port Control Switching ² [Default] | [ScrLk] + [ScrLk] + [Z] | - | Enable the binding of PC port and hub port control switching. (Once this feature is enabled, any PC and/or hub port control switching is bound together) (factory default) |
| Unbind PC and Hub Port Control Switching ² | [ScrLk] + [ScrLk] + [X] | - | Disable the binding of PC port and hub port control switching |
| Bind PC and Audio&Mic Switching ² [Default] | [ScrLk] + [ScrLk] + [Q] | - | Enable the binding of PC port and audio&mic switching. (Once this feature is enabled, any PC and /or audio&mic switching is bound together) (factory default) |
| Unbind PC and Audio&Mic Switching ² | [ScrLk] + [ScrLk] + [W] | - | Disable the binding of PC port and audio&mic switching |
| Previous PC port ² (Jointly select PC / hub port control, if binding is enabled) | [ScrLk] + [ScrLk] + [↑] (arrow up) | - | Select the previous connected PC port (Jointly select PC / hub port control, if binding is enabled) |
| Next PC port ² (Jointly select PC / hub port control, if binding is enabled) | [ScrLk] + [ScrLk] + [↓] (arrow down) | - | Select the next connected PC port (Jointly select PC / hub port control, if binding is enabled) |
| Previous PC port | [ScrLk] + [ScrLk] + [←] (Backspace) | - | Toggle between the previous port and current port |
| Beep Sound On/Off | [ScrLk] + [ScrLk] + [B] | - | Toggle on / off the beep sound while autoscanning |
| Define Hotkey Preceding Sequence | [ScrLk] + [ScrLk] + [H] + [ly] y = SCROLL LOCK, CAPS, ESC, F12 or NUM LOCK | Press and hold down last button (Button 2 / Butotr4) till two beeps, release the button, then press (y) key | Select the hotkey preceding sequence among 5 alternative keys |
| Autoscan | [ScrLk] + [ScrLk] + [S] | - | Autoscan through every connected port for quick screen browsing of each port (scan delay = 5 sec.). |
| Autoscan with Programmable Delay Time | [ScrLk] + [ScrLk] + [S] + [z] z = 0-9 1→10°; 2→20°; 3→30°; 4→40°; 5→50°; 6→60°; 7→70°; 8→80°; 9→90°; 0→100° | - | Autoscan with a user-defined delay time within a range of 10 ~ 100 seconds |
| Stop Autoscan | Press any button | Press any button | Terminate autoscan activity |

Note:
 1. The USB keyboard hotkeys allows you a faster and broader control for your KVM switching operation in addition to the front panel button. If you have configured a hotkey preceding sequence other than two consecutive scroll locks, here you should change your hotkey sequence accordingly. (For preceding sequence key configuration, please refer to "Define Hotkey Preceding Sequence" in above table.)
 2. When the binding of PC & USB hub port control switching is enabled by the hotkey sequence: ScrLk + ScrLk + Z, any PC and hub port control switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + X.
 3. When the binding of PC and audio&mic switching is enabled by the hotkey sequence: ScrLk + ScrLk + Q, any PC and audio&mic switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + W.

Declaration of Conformity

TRENDNET®

Manufacturer's Name and Address

TRENDnet, Inc.
20675 Manhattan Place
Torrance, CA 90501 USA



Zwolsestraat 156 2587 WB
The Hague The Netherlands

Product Information:

Model Number: TK-232DV
Product Name: 2-Port Dual Monitor DVI KVM Switch
Trade Name: TRENDnet

TRENDnet hereby declares that the product is in compliance with the essential requirements and other relevant provisions under our sole responsibility.

Safety EN 60950-12006+A11:2009+A1:2010+A12:2011+A2:2013

EMC EN 55032:2012+AC:2013 Class A
EN 61000-3-2:2014 Class A
EN 61000-3-3:2013
EN 55024:2010
EN 61000-4-2: 2009
EN 61000-4-3: 2006+A1:2008+A2:2010

This product is herewith confirmed to comply with the Directives.

Directives: EMC Directive 2014/30/EU
RoHS Directive 2011/65/EU
REACH Regulation (EC) No. 1907/2006
Low Voltage Directive 2006/95/EU
Ecodesign Directive 2009/125/EU
WEEE Directive 2012/19/EU

Person responsible for this declaration.

Place of Issue: Torrance, California, USA

Date: July 27, 2018

Name: Sonny Su

Title: Director of Technology

Signature:



Déclaration de conformité

TRENDNET®

Nom et adresse du fabricant

TRENDnet, Inc.
20675 Manhattan Place
Torrance, CA 90501 USA



Zwolsestraat 156 2587 WB
The Hague The Netherlands

Détails du produit

Modèle: TK-232DV
Nom du produit: Switch KVM Dual Monitor DVI à 2 ports
Nom Commercial: TRENDnet

TRENDnet déclare par la présente que le produit est conforme aux exigences essentielles et aux autres dispositions pertinentes de la Directive en vertu de notre seule responsabilité.

Safety EN 60950-12006+A11:2009+A1:2010+A12:2011+A2:2013

CEM EN 55032:2012+AC:2013 Class A
EN 61000-3-2:2014 Class A
EN 61000-3-3:2013
EN 55024:2010
EN 61000-4-2: 2009
EN 61000-4-3: 2006+A1:2008+A2:2010

Ce produit est conforme à la directives suivante.

Directives: Directive CEM 2014/30/UE
Directive RoHS 2011/65/UE
REACH Règlement (UE) N° 1907/2006
Directive Basse Tension 2014/35/UE
Ecodesign Directive 2009/125/UE
Directive WEEE 2012/19/UE

Personne responsable de cette déclaration.

Lieu de délivrance: Torrance, California, USA

Date: 27 Juillet, 2018

Nom: Sonny Su

Position: Director of Technology

Signature:



Certifications

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.

Applies to PoE Products Only: This product is to be connected only to PoE networks without routing to the outside plant.

Note

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Advertencia

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

Technical Support

If you have any questions regarding the product installation, please contact our Technical Support.
Toll free US/Canada: **1-866-845-3673**
Regional phone numbers available at www.trendnet.com/support

Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at: www.trendnet.com/register

TRENDnet

20675 Manhattan Place
Torrance, CA 90501
USA

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service. Specific warranty periods are listed on each of the respective product pages on the TRENDnet website.

Garantie Limitée

TRENDnet garantit ses produits contre les problèmes de matériel ou de fabrication, dans des conditions normales d'utilisation et de service. Les périodes de garanties précises sont mentionnées sur chacun des pages produits du site web de TRENDnet.

Eingeschränkte Garantie

TRENDnet gewährt eine Garantie für seine Produkte im Falle von Material- und Bearbeitungsdefekten, bei normaler Verwendung und Wartung. Spezielle Garantiezeiträume werden auf jeder Produktseite auf der Website von TRENDnet genannt.

Garantía limitada

TRENDnet garantiza que sus productos carecen de defectos en el material y la fabricación, en condiciones de uso y funcionamiento normales. Los periodos específicos de garantía figuran en cada una de las páginas de producto del sitio web de TRENDnet.

Ограниченная гарантия

Компания TRENDnet предоставляет гарантию на свои изделия от дефектов материалов и сборки при нормальном использовании и обслуживании. Конкретные гарантийные сроки указаны на странице каждого продукта на сайте компании TRENDnet.

Garantia Limitada

A TRENDnet garante seus produtos contra defeitos de material e mão de obra sob condições normais de uso e serviço. Os períodos de garantia específicos estão listados em cada uma das páginas dos respectivos produtos no site da TRENDnet.

Piiratud garantii

TRENDneti garantii hõlmab materjali- ja koostamisdefekte, mis ilmnevad toote tavapärasel kasutamisel. Garantiaaja täpne pikkus konkretse toote puhul on leitud TRENDneti kodulehelt vastava toote infolehel.

Garanzia limitata

TRENDnet garantisce i propri prodotti da difetti di materiali e manodopera, in condizioni di normale uso ed esercizio. I periodi di garanzia specifici sono elencati sulle rispettive pagine di prodotto sul sito TRENDnet.