

TK-200/TK-400

**KVM Switch Kit
User's Guide**

**Le Guide de l'utilisateur du
Kit de Switch KVM**

**Diese Benutzeranleitung
KVM-Umschalters**

**Esta guía del usuario
Kit de conmutador KVM**

**КVM-коммутатор в комплекте
Руководство пользователя**

Version 10.12.04



TRENDnet[®]
TRENDware, USA
What's Next in Networking

Table of Contents

English	1
1. Prepare for Installation	1
2. Introduction	2
3. Installation	3
4. Operation	4
Specifications	5
Troubleshooting	6

English UG

1. Prepare for Installation

Thank you for purchasing TRENDnet's TK-200K/TK-400K KVM Switch Kit. This guide will help you set up your KVM switch. Following the installation instructions should be quick and easy. If you run into problems, please refer to the Troubleshooting section. If you need further technical support, please visit www.TRENDNET.com or call our technical support team by phone.

Verify Package Contents

Please make sure you have everything in the box:



The TK-200K 2-Port or TK-400K 4-Port PS/2 KVM Switch is compatible with virtually all computers and operating systems. You only need to have one monitor, one PS/2 keyboard, and one PS/2 mouse.

2. Introduction

The TK-200K/TK-400K is a PS/2 KVM Switch Kit that allows you to control 2 or 4 computers, respectively, using a single monitor, PS/2 keyboard, and PS/2 mouse. By using this KVM Switch, you'll cut hardware costs, save valuable space, and reduce energy consumption. KVM cables are included in this kit for your convenience.

Hardware Support

The TK-200K or TK-400K KVM Switch is compatible with virtually all PS/2 mice, including Microsoft Intellimouse, Microsoft Optical Mouse, and Logitech Net Mouse.

Software Support

The TK-200K or TK-400K KVM Switch does not require any drivers or software. It is compatible with the following operating systems: Windows 98/ME/2000/XP/2003 Server, Linux, and Netware.

Plug-N-Play and Hot-Pluggable

The TK-200K or TK-400K KVM Switch connects to your computers via the PS/2 interface for convenient Plug-and-Play functionality and hot-pluggability.



Front-panel buttons and Hot-Key Commands

You can use the front-panel push buttons or Hot-Key commands to switch between your computers quickly and easily.

With full-sized features crammed into a space-conserving size, TRENDnet's TK-200K/TK-400K KVM Switch is perfect for use at home or in the office.

3. Installation

1. Turn off both computers and their peripherals, and disconnect all power cords.
2. Connect the shared keyboard, monitor, mouse to their respective ports on the KVM switch. The KVM Switch's inputs are color-coded for your convenience.
3. Connect each set of integrated KVM cables to each computer's video, PS/2, mouse connectors.
4. Turn on the connected computers. After the computers boot up completely, you may begin operating the KVM switch. **Installation is now complete.**

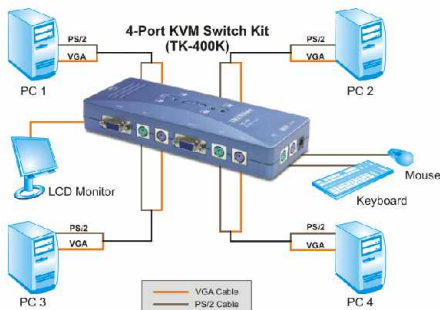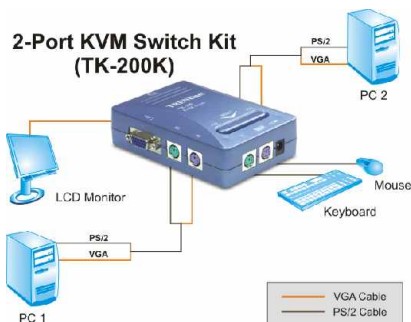

NOTE: Do not switch the PC port (i.e.: Do not press the push button of the KVM switch or enter a "Hot-Key" command) while the computers are booting up.

4. Operation

To switch between computers, you use the front-panel push buttons or hot-key commands.

Hot-Key Commands

A keyboard hot-key command consists of three keystrokes:

Hot-Key command = ScrLk + ScrLk + Command key(s)

After pressing the ScrLk key, you have 2 seconds to press the ScrLk key again. You then have another 2 seconds to press a command key. If you do not press a key within 2 seconds, the switch will exit hot-key mode.

Below are the “Hot-Key” commands:

 +  +  = Previous Channel

 +  +  = Next Channel

 +  +  = Auto Scan

In Hot-Key mode, press the “Up-Arrow” to select the previous port, “Down Arrow” to select the next port, and “S” key to set the KVM switch to Auto-Scan mode.

Specifications

Computer Connections:	2 (TK-200K) or 4 (TK-400K)
KVM Cable:	TK-200K: 2 sets of integrated 1.2 M (4 ft) KVM Cables TK-400K: 4 sets of integrated 1.8 M (6 ft) KVM Cables
Console Port Connectors:	1 x PS/2 keyboard 6-pin mini din female 1 x PS/2 mouse 6-pin mini din female 1 x VGA HDB15 (15-pin) female
PC Port Connectors:	2 x PS/2 keyboard 6-pin mini din female (TK-200K) 2 x PS/2 mouse 6-pin mini din female (TK-200K) 2 x VGA HDB15 (15-pin) female (TK-200K) 4 x PS/2 keyboard 6-pin mini din female (TK-400K) 4 x PS/2 mouse 6-pin mini din female (TK-400K) 4 x VGA HDB15 (15-pin) female (TK-400K)
VGA Resolution:	1920 x 1440
Port Selection:	Push Button and Hot-Key Commands
Auto-Scan Intervals:	10 seconds
Power Type:	PS/2 Interface Power. Optional 5V~9V DC, 500mA~1A Adapter
Dimensions:	TK-200K: 113 x 84 x 31 mm (4.45 x 3.31 x 1.22 inches) TK-400K: 192 x 81 x 31 mm (1.56 x 3.19 x 1.22 inches)
Weight:	Approx. 155g. (5.5 Oz.) (TK-200K) Approx. 240g. (8.5 Oz.) (TK-400K)
Operating Temperature:	0° ~ 40°C (32° ~104° F)
Storage Temperature:	-20° ~ 60°C (-4° ~ 140° F)
Humidity:	0%~90%, Non-Condensing
Certifications:	FCC and CE

Troubleshooting

Q1: Where is the power supply? I did not find one in the box.

A1: The TK-200K/TK-400K does not require a power supply. It draws power from the PS/2 connection of your computers. As long as you are connected to the PS/2 port, your KVM switch will function.

Q2: Can I connect and disconnect the PS/2 cables while the computers are turned on?

A2: Yes, you can connect or disconnect the PS/2 cables while the computers are turned on because the KVM switch is Plug-and-Play and Hot-Pluggable.

Q3: Will the KVM switch restore the keyboard settings when switching between computers?

A3: Yes, the KVM switch will restore the keyboard settings between computers such as Cap lock, Num key, etc.

Q4: How do I switch from one computer to another with the KVM switch?

A4: You can switch PCs by pressing the Push button on the KVM switch or by using the Hot-Key commands. For a complete listing of the Hot-Key commands, see the reverse-side of this page.

If you have further questions, please contact Trendware's Technical Support Department.

Contact Technical Support

Telephone: +1-310-626-6252

Fax: +1-310-626-6267

Website: www.TRENDNET.com

E-mail: support@trendware.com

Technical Support Hours

7:00AM ~ 6:00PM, Monday through Friday

Pacific Standard Time (except holidays)

Certifications

This equipment has been tested and found to comply with FCC and CE Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.
Including interference that may cause undesired operation.





TRENDware, USA

What's Next in Networking

Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDware's website at <http://www.TRENDNET.com>

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA 90505

<http://www.TRENDNET.com>