

Lühike paigaldusjuhend



TPE-111GI
TPE-112GS

Eesti	1
1. Enne alustamist	1
2. Tootekirjeldus	3
3. Riistvara paigaldamine	4
Tehnilised tingimused	6
Tõrkeotsing	7

1. Enne alustamist





Pakendi sisu

- TPE-111GI/TPE-112GS
- Toitekaabel (TPE-111GI)
- 2 x üleminekukaablit (TPE-112GS)


Märkus: TPE-111GI ja TPE-112GS toetavad ainult Power over Ethernet (PoE) seadmeid, mis järgivad IEEE 802.3af standardit

Märkus: TPE-112GS toetab ainult mitte-PoE seadmeid väljundvõimsusega 5V, 7.5V, 9V või 12V.

TPE-111GI Rakendus

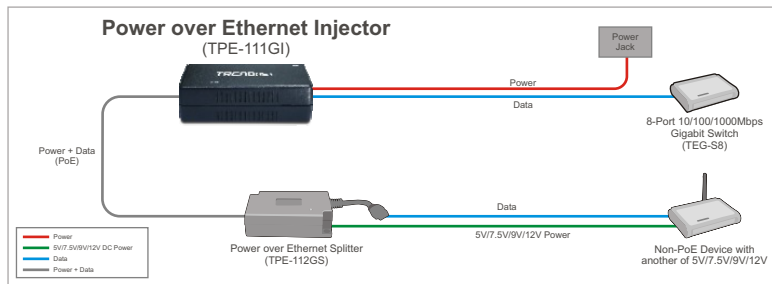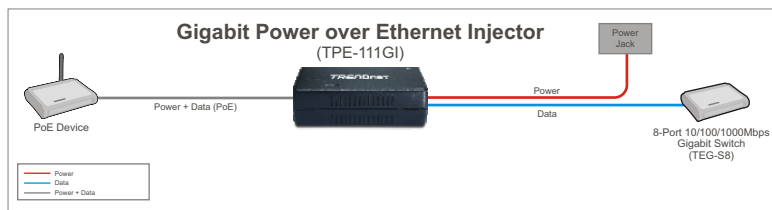

TPE-112GS Rakendus

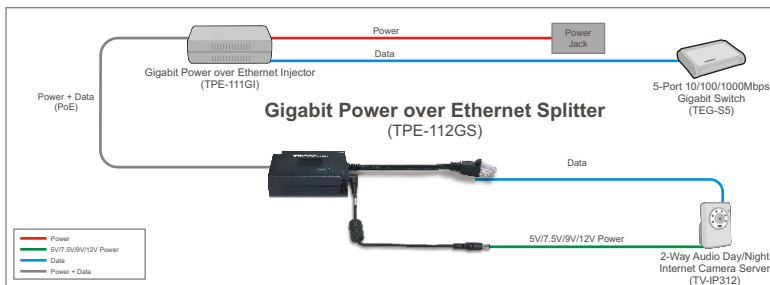

Esipaneel

Toide

Roheline tuli põleb, kui toitekaabel on ühendatud seinakontakti ja PoE seade on ühendatud injektoriga.



TOIDE

Roheline tuli põleb, kui PoE seade on ühendatud splitteriga.




TPE-111GI kasutamine PoE seadmega



1. Ühendage **toitekaabel AC toiteplokki**. Seejärel ühendage toitekaabel seinakontakti.

2. Ühendage CAT-5 kaabel switchist TPE-111GI **DATA IN** porti.

3. Ühendage CAT-5 kaabel PoE seadmest (nt. TPE-224WS) TPE-111GI **PoE OUT** porti.



TPE-112GS kasutamine mitte-PoE seadmega

Märkus: Pange tähele infot mitte-PoE seadme väljundvõimsuse kohta.

TPE-112GS toetab ainult mitte-PoE seadmeid väljundvõimsusega 5V, 7.5V, 9V või 12V.



1. Valige sobiv pinge (5V, 7.5V, 9V or 12V).

2. Ühendage Etherneti kaabel PoE switchist TPE-112GS **DATA-IN** porti.



3. Ühendage TPE-112GS'i sisseehitatud Etherneti kaabel mitte-PoE seadme LAN porti (nt. TEW-633GR).



4. Ühendage kaasasolev üleminekukaabel mitte-PoE seadme (nt. TEW-633GR) ja TPE-112GS'iga.

Paigaldamine on lõppenud.

Teie seadmete registreerimine

Et kindlustada teid parima teeninduse ja toega, palun leidke moment, et registreerida teie toode OnLines - www.Trendnet.com/register

Täname, et te valisite TRENDnet'i.

Tehnilised tingimused

Kehtivad standardid		IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3af Power Over Ethernet (PoE)
Ethernet Pin'i kasutus		Andmed:1,2,3,6 Toide: 4, 5 (V+), 7, 8 (V-)
Fikseeritud pordid	TPE-111GI	1 Data In, 1 PoE Out
	TPE-112GS	1 PoE In, 1 Data Out
Kiirus		10/20Mbps pool/täis-duplexi jaoks 100/200Mbps pool/täis-duplexi jaoks 2000Mbps täis-duplexi jaoks
LED indikaatorid		POWER
DIP switchid	TPE-112GS	DC OUT (5V, 7.5V, 9V, 12V)
Etherneti kaabel		10BASE-T : UTP/STP Cat. 3, 4, 5 100BASE-TX : UTP/STP Cat. 5, 5e, 6 1000BASE-T : UTP/STP Cat. 5e, 6
Üleminekukaablid (mõõtmed)		1 x 5.5 x 2.0mm 1 x 5.5 x 2.5mm
Mõõtmed	TPE-111GI	115 x 57 x 35mm (4.5 x 2.2 x 1.4 in.)
	TPE-112GS	80 x 55 x 26mm (3.2 x 2.17 x 1.03 in.)
Kaal	TPE-111GI	325g (11.6oz.)
	TPE-112GS	120g (4.23oz.)
Toide	TPE-111GI	48V DC, 0.3A
	TPE-112GS	DC väljund 5V , 7.5V, 9V, or 12V
Energia tarbimine	TPE-111GI	19 watts (maks.)
	TPE-112GS	12 watts (maks.)
Toimimistemperatuur		0°C ~ 45°C (32°F ~ 104°F)
Ladusamistemperatuur		-40°C ~ 70°C (14°F ~ 158°F)
Niiskus		10 ~ 90%, mitte kondenseeriv
Sertifikaadid		FCC, CE

Q1: Miks on TPE-111GI POWER LED-tuli välja lülitatud?

V1: Veenduge, et TPE-111GI on seinakontakti ühendatud. Teiseks, veenduge, et PoE seade on korralikult ühendatud TPE-111GI'ga. Kolmandaks, proovige kasutada teist CAT-5e/5 kaablit.

Q2: Miks on TPE-112GS'i POWER LED-tuli välja lülitatud?

V2: Veenduge, et TPE-112GS on korralikult PoE switchiga või TPE-111GI'ga ühendatud (vaadake punkt 3. Riistavara paigaldamine). Teiseks, proovige kasutada teist CAT-5e/5 kaablit.

Q3: Kas TPE-111GI töötab iga POE seadmega?

V3: TPE-111GI töötab iga PoE seadmega, mis järgib IEEE 802.3af standardit.

Q4: Kas TPE-112GS töötab iga mitte-POE seadmega?

V4: TPE-112GS töötab mitte-PoE seadmega, nagu näiteks access point'id, siis kui mitte-PoE seade töötab 5V, 7.5V, 9V või 12V-ga.

Q5: Ma ühendasin mitte PoE seadme TPE-112GS'iga, aga switch ei tunnista seadet.

V5: Katkestage mitte-PoE toiteühendus, kas toiteploki PoE injektorist välja tõmmates või Etherneti kaabli eemaldamisega PoE OUT pordist. Taastage ühendus pärast 5-10 sekundi möödumist.

Q6: Minu seade on pärast TPE-111GI /TPE-112GS'iga ühendamist sisse lülitatud, aga ma ei saa Gigabit kiirust. Mida ma peaksin tegema?

V6: Veenduge, et Te kasutate Cat-5e/5 või Cat 6 Etherneti kaablit. Mõned CAT-5e/5 kaablid ei sobi Gigabit'is töötamiseks.

Kui teil endiselt esineb probleeme või on küsimusi fiiberkonverterite kohta, palun võtke ühendust TRENDneti tehnilise toe osakonnaga

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

TPE-111GI/TPE-112GS - 5 Year Warranty

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or deliver to customer an equivalent product to replace the defective item. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product through any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

Note: AC/DC Power Adapter, Cooling Fan, Cables and Power Supply carry a 1-Year Warranty

Sertifikaadid:

Antud seade on testitud ja leitud vastavaks FCC ja CE seadustega.

1. Antud seade ei põhjusta kahjulikke häireid.
2. Antud seade peab vastu võtma kõik saadud häired, sealhulgas häired, mis võivad põhjustada soovimatut tööd.



Elektri- ja elektroonikatoodete jäätmeid ei tohi ära visata koos olmejäätkeidega. Abivahendite olemasolu korral palume ümber töötlemiseks sorteerida. Küsi nõu jäätmete ümber töötlemise kohta oma kohalikul jaemüüjalt.



MÄRKUS: TOOTJA EI VASTUTA ÜHEGI TV VÕI RAADIO HÄIRETE EEST, MIS ON PÕHJUSTATUD ANTUD SEADME LUBAMATUST ÜMBEREHITAMISEST. IGASUGUNE ÜMBERMODIFITSEERIMINE TÜHISTAB AUTORIVASTUTUSE ANTUD SEADMELE.



TRENDnet Technical Support

US • Canada

Toll Free Telephone: 1(866) 845-3673

24/7 Tech Support



Europe (Germany • France • Italy • Spain • Switzerland • UK)

Toll Free Telephone: +00800 60 76 76 67

English/Espanol - 24/7

Francais/Deutsch - 11am-8pm, Monday - Friday MET

Worldwide

Telephone: +(31) (0) 20 504 05 35

English/Espanol - 24/7

Francais/Deutsch - 11am-8pm, Monday - Friday MET

Product Warranty Registration

Please take a moment to register your product online.

Go to TRENDnet's website at <http://www.trendnet.com/register>

TRENDnet[®]
20675 Manhattan Place
Torrance, CA 90501
USA