





## Quick Installation Guide

8-Port Rackmount KVM Switch

TK-803R

16-Port Rackmount KVM Switch

TK-1603R

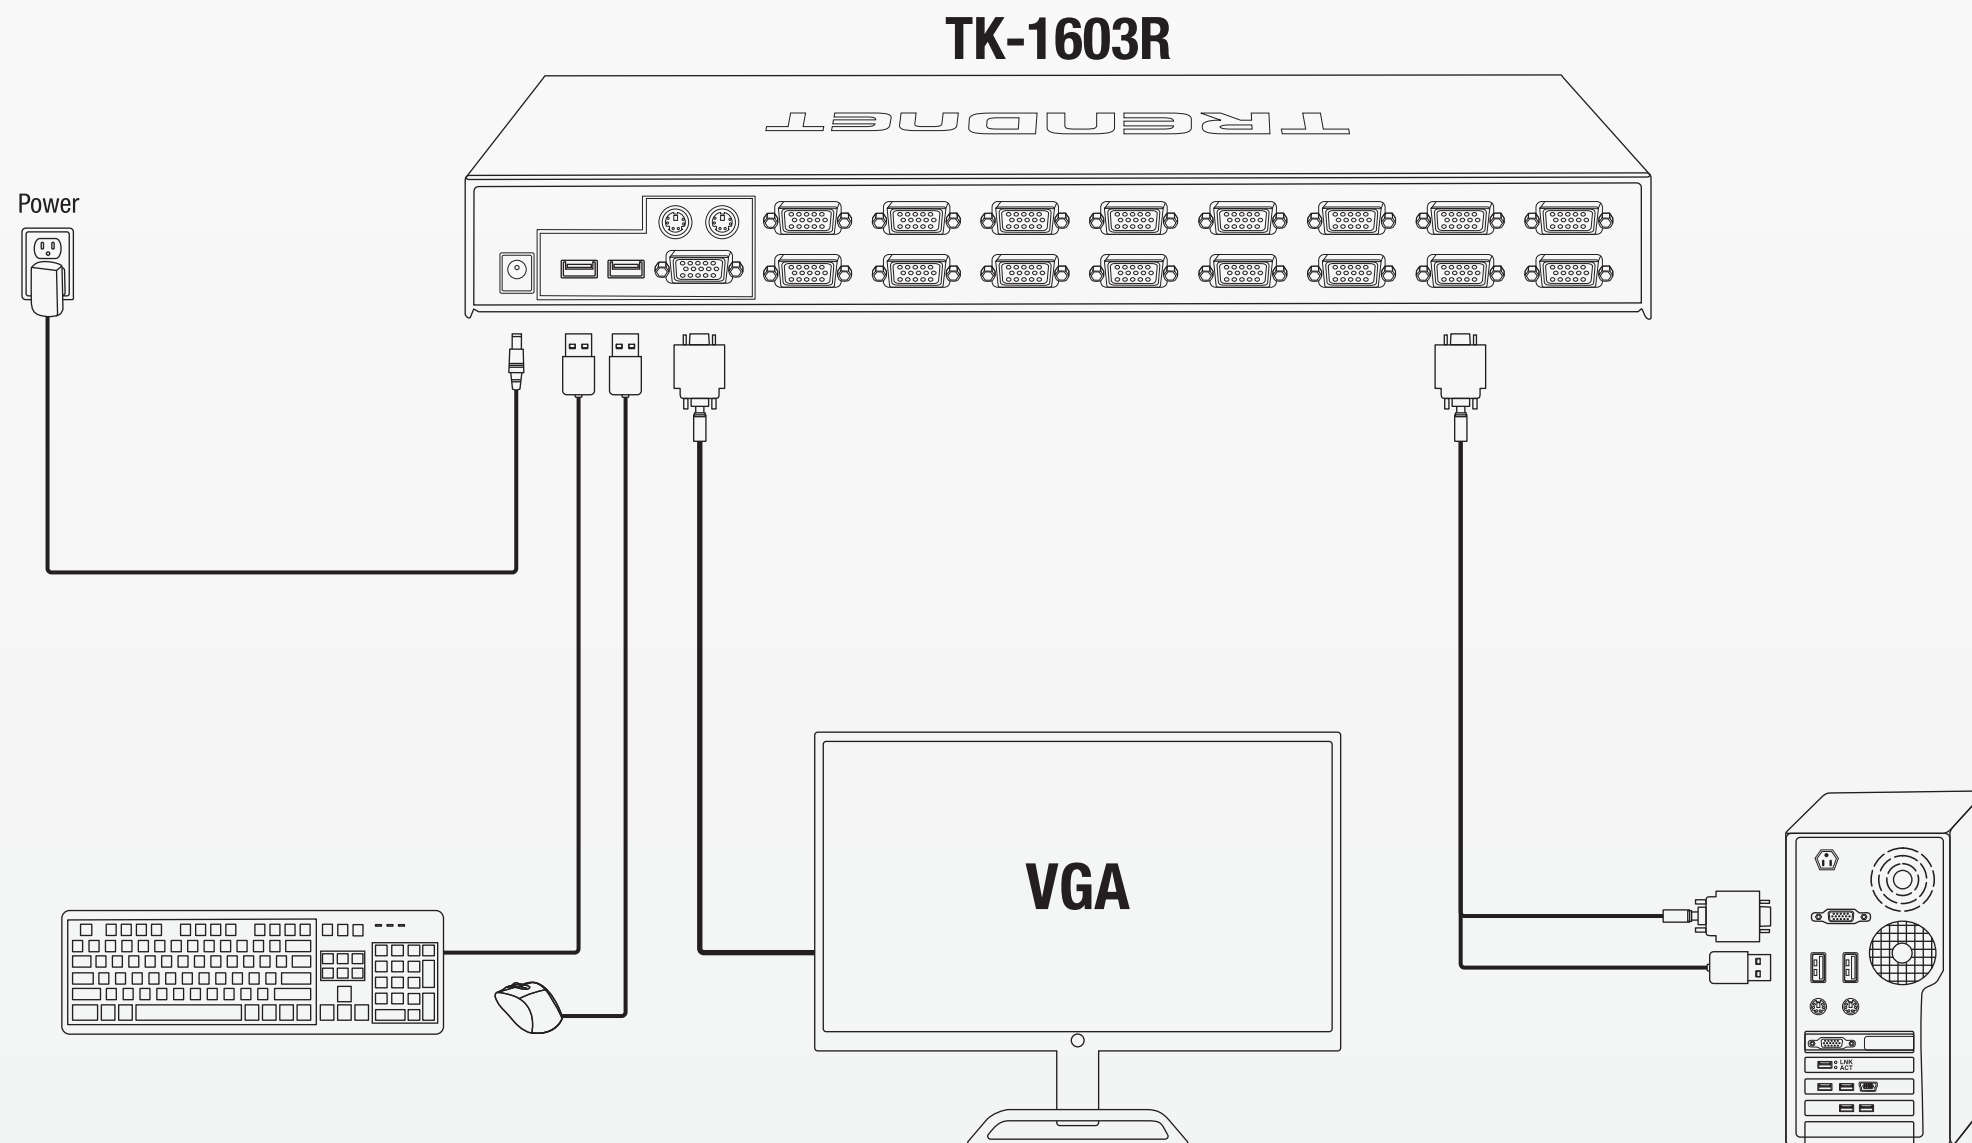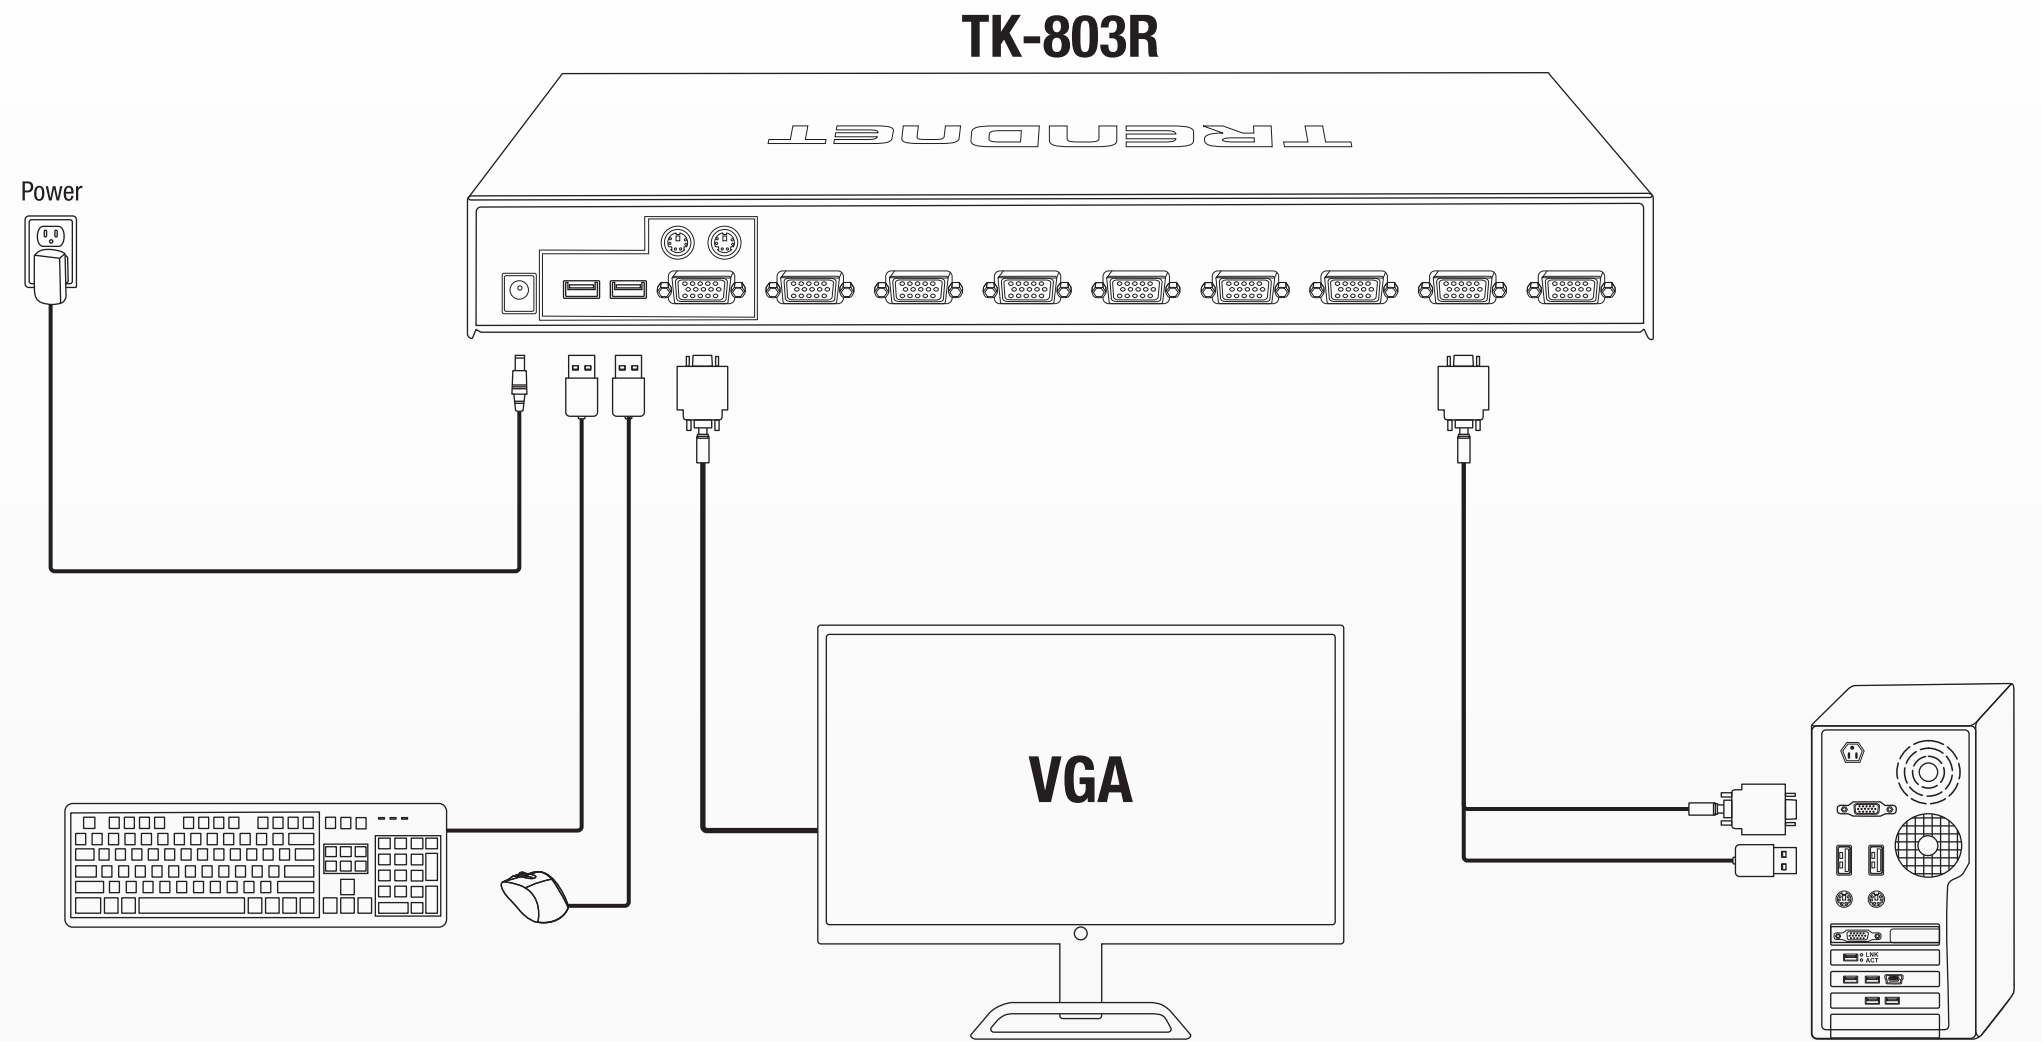

TK-803R

TK-1603R

TK-803R / TK-1603R KVM General Quick Reference Sheet			
Command	Hot Keys	Front Panel Button	Description
Select Computer	TK-803R Scroll Lock + Scroll Lock + (Y) (Y) = 2-digit Port Number (01-08) TK-1603R Scroll Lock + Scroll Lock + (Y) + (Z) (YZ) = 2-digit port number (01-16)	Press the push button for a specific port to switch to that computer	Select the desired computer
Next Higher Computer Channel	Scroll Lock + Scroll Lock + ↑	Press push button for a specific port on the switch	Select the next higher available computer
Next Lower Computer Channel	Scroll Lock + Scroll Lock + ↓	Press push button for a specific port on the switch	Select the next lower available computer
Autoscan	Scroll Lock + Scroll Lock + S	—	Autoscan through every connected channel for quick screen browsing of each channel
Autoscan with Programmable Delay Time	Scroll Lock + Scroll Lock + S + (X) (X) fx = 0 ~ 9 1 = 10 seconds 2 = 20 seconds 3 = 30 seconds 4 = 40 seconds 5 = 50 seconds 6 = 60 seconds 7 = 70 seconds 8 = 80 seconds 9 = 90 seconds 0 = 100 seconds	—	Autoscan through every connected channel for quick screen browsing of each channel in (10-100 seconds)
Stop Autoscan	Press any key on keyboard	Press any button	Terminate autoscan activity
Autoscan Beep Sound On/Off	Scroll Lock + Scroll Lock + B	—	Terminate autoscan activity.
Mouse/Keyboard Reset Console	Scroll Lock + Scroll Lock + END	—	Toggle On/Off beep sound during autoscan mode
Restore to Factory Defaults	Scroll Lock + Scroll Lock + R	—	Resets Mouse/Keyboard
Define Hot key Sequence (Default =	Scroll Lock + Scroll Lock + H + (Y) (Y) = Scroll Lock, Caps Lock, Esc, F12 or Num Lock	Press and hold down button 4 for over 8 seconds, then release the button and press	Select the hot key preceding sequence among 5 options

**Note:**

- The hot key sequence Scroll Lock + Scroll Lock + (Key) denotes that you should hit the individual key consecutively one at a time, not simultaneously.
- After pressing the Scroll Lock key, you have 2 seconds to press the Scroll Lock key again. You then have another 2 seconds to press a command key. A beep confirms that the KVM switch is in "hot key" mode. If you do not press a key within 2 seconds, the switch will exit hot key mode.

## Declaration of Conformity

TRENDNET®

### Manufacturer's Name and Address

TRENDnet, Inc.  
20675 Manhattan Place  
Torrance, CA 90501 USA

Zwolsestraat 156 2587 WB  
The Hague The Netherlands



### Product Information:

**Model Number:** TK-803R / TK-1603R  
**Product Name:** 8-Port Rackmount KVM Switch  
16-Port Rackmount KVM Switch

**Trade Name:** TRENDnet

TRENDnet hereby declares that the product is in compliance with the essential requirements and other relevant provisions under our sole responsibility.

**Safety** EN 62368-1:2014+A11:2017

**EMC** EN 55032:2015+AC:2016  
EN 55035:2017  
EN 61000-3-2:2014 Class A  
EN 61000-3-3:2013  
EN 61000-4-2:2009  
EN 61000-4-3:2006+A1:2008+A2:2010  
EN 61000-4-4:2012  
EN 61000-4-5:2014+A1:2017  
EN 61000-4-6:2014  
EN 61000-4-8:2010  
EN 61000-4-11:2004+A1:2017

This product is herewith confirmed to comply with the Directives.

**Directives:** EMC Directive 2014/30/EU  
RoHS Directive (EU)2015/863  
WEEE Directive 2012/19/EU  
REACH Regulation (EC) No. 1907/2006  
Low Voltage Directive 2014/35/EU

Person responsible for this declaration.

Place of Issue: Torrance, California, USA

Date: July 21, 2020

Title: Director of Technology

Name: Sonny Su

Signature:



## Déclaration de conformité

TRENDNET®

### Nom et adresse du fabricant

TRENDnet, Inc.  
20675 Manhattan Place  
Torrance, CA 90501 USA

Zwolsestraat 156 2587 WB  
The Hague The Netherlands



### Détails du produit

**Modèle:** TK-803R / TK-1603R  
**Nom du produit:** Switch KVM à 8 ports montable sur rack  
Switch KVM à 16 ports montable sur rack

**Nom Commercial:** TRENDnet

TRENDnet déclare par la présente que le produit est conforme aux exigences essentielles et aux autres dispositions pertinentes de la Directive en vertu de notre seule responsabilité.

**Sécurité** EN 62368-1:2014+A11:2017

**CEM** EN 55032:2015+AC:2016  
EN 55035:2017  
EN 61000-3-2:2014 Class A  
EN 61000-3-3:2013  
EN 61000-4-2:2009  
EN 61000-4-3:2006+A1:2008+A2:2010  
EN 61000-4-4:2012  
EN 61000-4-5:2014+A1:2017  
EN 61000-4-6:2014  
EN 61000-4-8:2010  
EN 61000-4-11:2004+A1:2017

Ce produit est conforme à la directives suivante.

**Directives:** Directive EMC 2014/30/UE  
Directive RoHS (UE)2015/863  
Directive WEEE 2012/19/UE  
REACH Règlement (CE) N° 1907/2006  
Directive Basse Tension 2014/35/UE

Personne responsable de cette déclaration.

Lieu de délivrance: Torrance, California, USA

Date: 09 Juillet, 2020

Position: Director of Technology

Nom: Sonny Su

Signature:



### Certifications

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.

Applies to PoE Products Only: This product is to be connected only to PoE networks without routing to the outside plant.

### Note

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

### Advertencia

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

### Technical Support

If you have any questions regarding the product installation, please contact our Technical Support.

Toll free US/Canada: **1-866-845-3673**

Regional phone numbers available at [www.trendnet.com/support](http://www.trendnet.com/support)

**TRENDnet**  
20675 Manhattan Place  
Torrance, CA 90501  
USA

### Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service. Specific warranty periods are listed on each of the respective product pages on the TRENDnet website.

### Garantie Limitée

TRENDnet garantit ses produits contre les problèmes de matériel ou de fabrication, dans des conditions normales d'utilisation et de service. Les périodes de garanties précises sont mentionnées sur chacun des pages produits du site web de TRENDnet.

### Eingeschränkte Garantie

TRENDnet gewährt eine Garantie für seine Produkte im Falle von Material- und Bearbeitungsdefekten, bei normaler Verwendung und Wartung. Spezielle Garantiezeiträume werden auf jeder Produktseite auf der Website von TRENDnet genannt.

### Garantía limitada

TRENDnet garantiza que sus productos carecen de defectos en el material y la fabricación, en condiciones de uso y funcionamiento normales. Los periodos específicos de garantía figuran en cada una de las páginas de producto del sitio web de TRENDnet.

### Ограниченная гарантия

Компания TRENDnet предоставляет гарантию на свои изделия от дефектов материалов и сборки при нормальном использовании и обслуживании. Конкретные гарантийные сроки указаны на странице каждого продукта на сайте компании TRENDnet.

### Garantia Limitada

A TRENDnet garante seus produtos contra defeitos de material e mão de obra sob condições normais de uso e serviço. Os períodos de garantia específicos estão listados em cada uma das páginas dos respectivos produtos no site da TRENDnet.

### Piiratud garantii

TRENDneti garantii hõlmab materjali- ja koostamisdefekte, mis ilmnevad toote tavapärase kasutamisel. Garantiaaja täpne pikkus konkreetsel tootel on leitud TRENDneti kodulehel vastava toote infolehel.

### Garanzia limitata

TRENDnet garantisce i propri prodotti da difetti di materiali e manodopera, in condizioni di normale uso ed esercizio. I periodi di garanzia specifici sono elencati sulle rispettive pagine di prodotto sul sito TRENDnet.