

## **TE-1710** **16-Port 10Base-T Ethernet Hub**


TRENDware Small Business Solutions series palmtop hubs provide a cost effective connectivity solution and plug-and-play solution for small departmental networks and workgroups. Their compact size and lightweight design provide easy installation and portability. In addition to the UTP/STP ports, the TE-1710 has an additional BNC connector for cascading up to 30 hubs through a 10 Base-2 backbone cable. Each hub is also equipped with an uplink port (shared with the last RJ45 port), makes connecting to another 10 Base-T hub effortless.

For added durability these hubs are protected by heavy gauge aluminum chassises. These hubs are also UL, CSA and FCC Class A approved, and features a 5 Year Parts and Labor Warranty.



### **FEATURES**

- > IEEE 802.3 10 Base-T and 10 Base-2 Ethernet Standard
- > CSMA/CD protocol for complete data integrity
- > Easy to Read LED's for Global Power, Collision, Link/Activity and BNC indicators
- > Auto-Partitioning
- > Uplink port (shared with the last RJ45 port) provides easy expansion to another hub
- > 10Mbps transfer rate
- > Heavy duty aluminum chassis
- > Compact, lightweight, and portable
- > UL & CSA Certified, FCC Class A
- > 5 Year Warranty

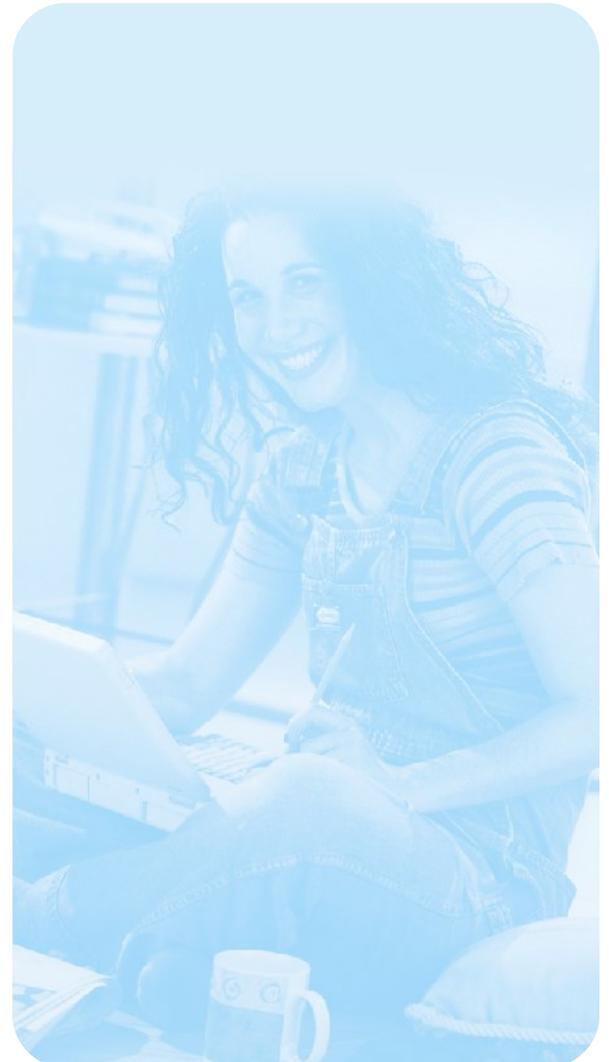

# TE-1710

## 16-Port 10Base-T Ethernet Hub

### SPECIFICATIONS

**Standards:**

- IEEE 802.3 10 Base-T and 10 Base-2

**Speed:**

- 10Mbps

**Ports:**

- 16 RJ45 UTP/STP port, 1 BNC port

**Power:**

- 7.5 VDC, 1A

**Dimensions:**

- 305 x 102 x 30 (mm)  
12.0"x4.0"x1.18" (L x W x H)

**Weight:**

- 625g / 1.38 lb

**Temperature:**

- Operating: 0°C ~ 50°C (32°F ~ 122°F)
- Storage: -20°C ~ 70°C (-4°F ~ 158°F)

**Humidity:**

- Operating: 10% ~ 80%
- Storage: 5% ~ 90%

**Certifications:**

- FCC, UL, CE



### PRODUCT INFORMATION

- TE-500: 5-Port 10Base-T Hub
- AD-0730: 120V AC power adapter for TE-500
- AD-0730B: 230V AC power adapter for TE-500
- TE-800: 8 RJ45 ports Ethernet hub
- TE-900: 10Base-T Ethernet Hub with 9 UTP Ports
- TE-910: 10Base-T Ethernet Hub with 8 UTP and 1 BNC Ports
- TE-910plus: 8 RJ45 ports + 1 BNC Ethernet hub
- TE-1710: 16 RJ45 ports + 1 BNC Ethernet hub

### ORDERING INFORMATION



**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.TRENDNET.com](http://www.TRENDNET.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)

**To Order Please Call:**  
**1-888-326-6061**