



- Home Smart Switch (with Wireless Extender)

THA-101

- Quick Installation Guide (1)

1. Before You Start

Package Contents

- THA-101
- Multi-Language Quick Installation Guide
- CD-ROM (User's Guide)

Minimum Requirements

- Existing Wireless N network
- Mobile device (e.g. smartphone, tablet) with Android (version 4 or higher) or iOS (version 6.1 or higher)


2. WPS Setup with Apple Mobile Device

Note:

- The WPS Setup requires an external WPS button on your existing wireless router (or access point) in order to connect the THA-101 to it. If your router doesn't have a WPS button or if you prefer to connect to your existing wireless network using our free app, jump to Section 3. Manual Wireless Setup with Apple Mobile Device.
 - If you have an Android mobile device, go to Section 4. WPS Setup with Android Device or Section 5. Manual Wireless Setup with Android Device.
1. For the initial installation, plug in the THA-101 into an outlet next to your existing wireless router (or access point). Toggle the power switch to the on position and wait 30 seconds while the device boots up.




2. Press the WPS button on your router for 5 seconds.
3. Press the WPS button on the smart switch for 5 seconds.

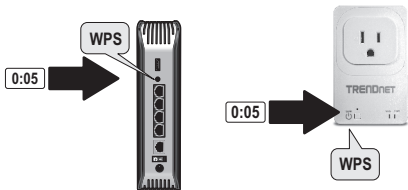

4. Go to the app store, search for TRENDnet Smart Home app and tap to install. Alternatively, scan the QR code to download and install the free TRENDnet Smart Home app.




5. Enable the Wi-Fi settings on your Apple mobile device and connect to your home wireless network.




6. Open the TRENDnet Smart Home icon.




7. Tap the add icon.

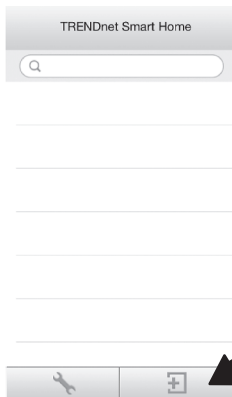

8. Click **LAN Search**.

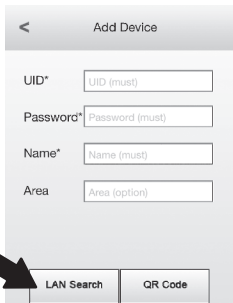


9. Select the device.

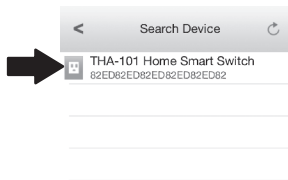


10. Enter the default password of **admin**.


11. Tap **Done** to save the changes.

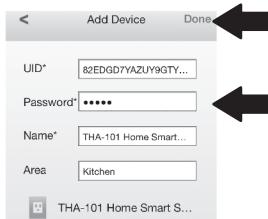

12. Tap on the device.

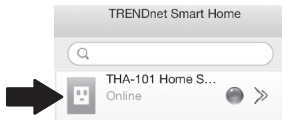

13. Tap the power icon to turn built-in power outlet on/off.



14. Initial THA-101 installation is now complete. You can now plug the THA-101 into its final location. For the built-in wireless extender to project the strongest wireless signal, plug in the THA-101 in an area where your mobile device still has minimum three bars of wireless signal strength from your existing wireless network.

15. Smart home switch installation is now complete. For detailed information regarding the smart home switch's configuration and advanced settings, please refer to the User's Guide CD-ROM. Please visit www.trendnet.com for product updates and online support.

3. Manual Wireless Setup with Apple Mobile Device

Note:


- The Manual Wireless Setup uses TRENDnet's free app to connect the THA-101 to your existing wireless network.
 - If you have an Android mobile device, go to Section 4. WPS Setup with Android Device or Section 5. Manual Wireless Setup with Android Device.
1. For the built-in wireless extender to project the strongest wireless signal, plug in the THA-101 in an area where your mobile device still has minimum three bars of wireless signal strength from your existing wireless network. Toggle the power switch to the on position and wait 30 seconds while the device boots up.




2. Go to the app store, search for TRENDnet Smart Home app and tap to install. Alternatively, scan the QR code to download and install the free TRENDnet Smart Home app.



3. Enable the Wi-Fi settings on your Apple mobile device, and connect to the THA-101.

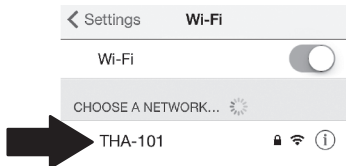


4. Enter the Password and tap **Join**. By default, the password is **password**.

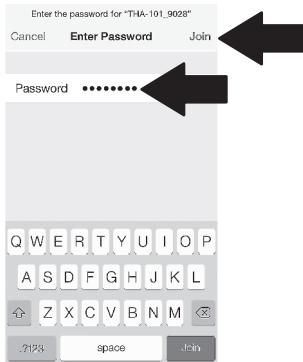

5. Open the TRENDnet Smart Home icon.




6. Tap the add icon.

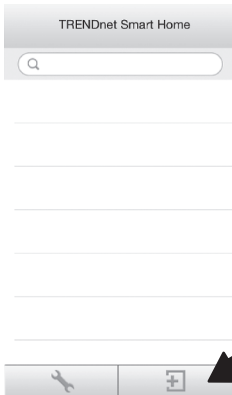

7. Click **LAN Search**.




8. Select the device.

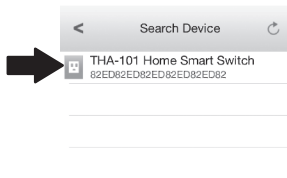


9. Enter the default password of **admin**.


10. Tap **Done** to save the changes.

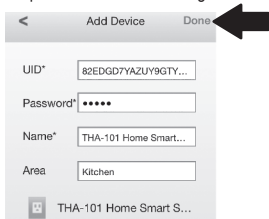


11. Tap the device settings icon.



12. Tap **Advanced Settings**.

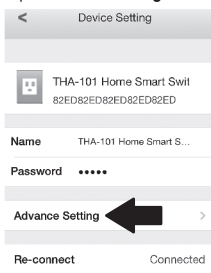

13. Tap **WiFi Setting**.




14. Tap **WiFi**.



15. Select your wireless network.




16. Enter your password and tap OK.




17. Close the app.

18. Connect your iPhone or iPad to your wireless network and re-launch the TRENDnet Smart Home App.

19. Tap on the device.

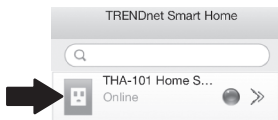

20. Tap the power icon to turn the built-in electrical outlet on/off.

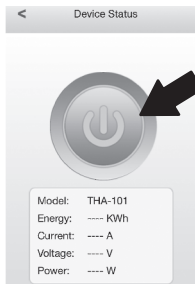

21. Smart home switch installation is now complete. For detailed information regarding the smart home switch's configuration and advanced settings, please refer to the User's Guide CD-ROM. Please visit www.trendnet.com for product updates and online support.


4. WPS Setup with Android Device

Note:

- The WPS Button Setup requires an external WPS button on your existing wireless router (or access point) in order to connect the THA-101 to it. If your router doesn't have a WPS button or if you prefer to connect to your existing wireless network using our free app, jump to Section 5. Manual Wireless Setup with Android Device.
 - If you have an Apple mobile device, go to Section 2. WPS Setup with Apple Mobile Device or Section 3. Manual Wireless Setup with Apple Mobile Device.
1. For the initial installation, plug in the THA-101 into an outlet next to your existing wireless router (or access point). Toggle the power switch to the on position and wait 30 seconds while the device boots up.



2. Press the WPS button on your router for 5 seconds.
3. Press the WPS button on the smart switch for 5 seconds.

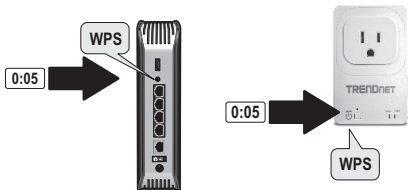

4. Go to the Play Store, search for the TRENDnet Smart Home App and tap to install it. Alternatively, scan the QR code to download and install the free TRENDnet Smart Home app.



5. Enable the Wi-Fi settings on your Apple mobile device and connect to your home wireless network.



6. Open the TRENDnet Smart Home icon.




7. Tap the add icon.



8. Tap LAN Search.




9. Select the device.



10. Enter the default password **admin**.


11. Press the **Add** icon.

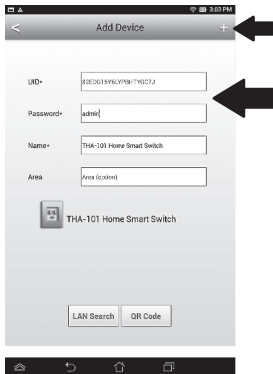

12. Tap on the device.



13. Tap the power icon to turn the built-in outlet on/off.



14. Initial THA-101 installation is now complete. You can now plug the THA-101 into its final location. For the built in wireless extender to project the strongest wireless signal, plug in the THA-101 in an area where your mobile device still has a minimum of three bars of wireless signal strength from your existing wireless network.

15. Smart home switch installation is now complete. For detailed information regarding the smart home switch's configuration and advanced settings, please refer to the User's Guide CD-ROM. Please visit www.trendnet.com for product updates and online support.

5. Manual Wireless Setup with Android Device

Note:

- The Manual Wireless Setup uses TRENDnet's free app to connect the THA-101 to your existing wireless network.
 - If you have an Apple mobile device, go to Section 2. WPS Setup with Apple Mobile Device or Section 3. Manual Wireless Setup with Apple Mobile Device.
1. For the built-in wireless extender to project the strongest wireless signal, plug in the THA-101 in an area where your mobile device still has a minimum of three bars of wireless signal strength from your existing wireless network. Toggle the power switch to the on position and wait 30 seconds while the device boots up.




2. Go to the Play Store, search for the TRENDnet Smart Home App and tap to install it. Alternatively, scan the QR code to download and install the free TRENDnet Smart Home app.



3. Enable the Wi-Fi settings on your Android mobile device and connect to the THA-101.




4. Enter the Password and tap **OK**. By default, the password is **password**.



5. Open the TRENDnet Smart Home app.



6. Tap the add icon.

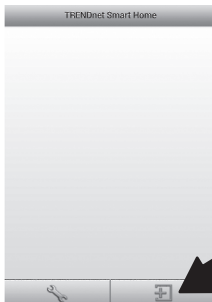

7. Tap **LAN Search**.




8. Select the device.



9. Enter the default password. The default password is **admin**.


10. Press the **Add** icon.

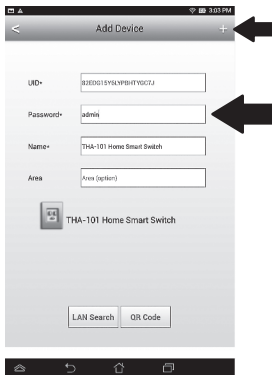


11. Tap the arrow to the right of the device.



12. Tap **Advanced**.

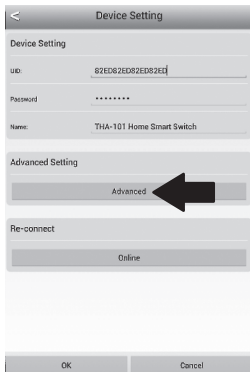


13. Tap **Loading...**

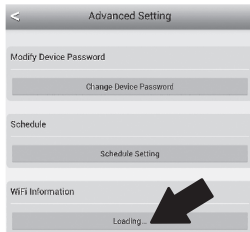

14. Select your wireless network.



15. Enter your WiFi password and tap OK.




16. Close the Smart Home app.

17. Connect your Android smartphone or tablet to your wireless network and restart the TRENDnet Smart Home app.

18. Tap on the device.



19. Tap the power icon to turn the built-in outlet on/off.

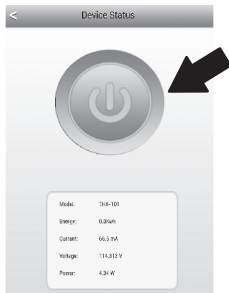

20. Smart home switch installation is now complete. For detailed information regarding the smart home switch's configuration and advanced settings, please refer to the User's Guide CD-ROM. Please visit www.trendnet.com for product updates and online support.

Declaration of Conformity

TRENDnet®

Company Information:

Company Name:

TRENDnet, Inc.

Company Address:

20675 Manhattan Place

Torrance, CA 90501

USA

Product Information:

Product Description:

Home Smart Switch (with Wireless Extender)

Model Number:

THA-101

Brand Name:

TRENDnet



Technical Standards:

EN 300 328 V1.8.1: 06-2012

EN 301 489-1 V1.9.1: 09-2011

EN 55022 : 2010 + AC: 2011

EN 55024 : 2010

EN 55385 : 2002

EN 60950-1: 2006 + A11 : 2009 + A1 : 2010 + A12: 2011

EN 62311 : 2008

Declaration:

This product is herewith confirmed to comply with the Directive of 1999/5/EC, 2006/95/EC and 2009/125/EC.

I hereby declare that the products and devices mentioned above are consistent with the standards and provisions of the guidelines.

Sonny Su

Name

Director of Technology

Title

August 26, 2014

Date

A handwritten signature in black ink, appearing to read 'Sonny Su', is written over a horizontal line. Below the line, the word 'Signature' is printed.

Signature

TRENDnet®

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following length of time from the date of purchase. Warranty: 3 year limited warranty (When Applicable: 1 year warranty for power adapter, power supply, and cooling fan components.) Visit TRENDnet.com to review the full warranty policy, rights, and restrictions for this product.

Garantie Limitée

TRENDnet garantit ses produits contre les défauts matériels et de fabrication, dans des conditions normales d'utilisation et de service, pour les durées suivantes, à compter de la date de leur achat. Garantie limitée: 3 ans (Si applicable: 1 an de garantie sur l'adaptateur secteur, l'alimentation en énergie et les composants du ventilateur de refroidissement.) Visitez TRENDnet.com pour lire la politique complète de garantie, les droits et les restrictions s'appliquant à ce produit.

Begrenzte Garantie

TRENDnet garantiert, dass seine Produkte bei normaler Benutzung und Wartung während der nachfolgend genannten Zeit ab dem Kaufdatum keine Material- und Verarbeitungsschäden aufweisen. Garantie: 3-Jahres-Garantie (Soweit zutreffend: 1 Jahr Garantie für Netzteil, Stromkabel und Ventilator.) Alle Garantiebedingungen, Rechte und Einschränkungen für dieses Produkt finden Sie auf TRENDnet.com.

Garantía Limitada

TRENDnet garantiza sus productos contra defectos en los materiales y mano de obra, bajo uso y servicio normales, durante el siguiente periodo de tiempo a partir de la fecha de compra. Garantía: 3 años (Cuando proceda: 1 año de garantía para componentes de adaptadores de corriente, fuente de alimentación y ventiladores de refrigeración.) Visite TRENDnet.com para revisar la política de garantía, derechos y restricciones para este producto.

Ограниченная гарантия

Гарантия компании TRENDnet распространяется на дефекты, возникшие по вине производителя при соблюдении условий эксплуатации и обслуживания в течение установленного периода с момента приобретения (Продукт: Ограниченная гарантия: Трехлетняя ограниченная гарантия (Распространяется: На протяжении 1 года на силовые адаптеры, источники питания и компоненты вентилятора охлаждения. Полную версию гарантийных обязательств, а также права пользователя и ограничения при эксплуатации данного продукта смотрите на вебсайте www.trendnetrussia.ru

Garantia Limitada

TRENDnet garante seus produtos contra defeitos em material e mão de obra, sob condições normais de uso e serviço, pelo seguinte tempo a partir da data da compra. Garantia: Garantia limitada de 3 anos. (Quando aplicável: 1 ano de garantia para adaptador de tensão, fonte e componentes de ventoinhas). Visite TRENDnet.com para conhecer a política de garantia completa, direitos e restrições para este produto.)

Piiratud garantii

TRENDneti tavatingimustes kasutatavatel ja hooldatavatel toodetel on järgmise ajavahemiku jooksul (alates ostukuupäevast) tootmis-ja materjalidefektide garantii. garantii: 3-aastane piiratud garantii. (Garantii kohaldatakse: toiteadapteri, toiteallika ja jahutusventilaatori osadel on 1-aastane garantii.) Täisgarantii põhimõtte, õiguste ja piirangute kohta leiate lisateavet saidilt TRENDnet.com.

Гарантія компанії

Гарантія компанії TRENDnet поширюється на дефекти, що виникли з вини виробника, при дотриманні умов експлуатації та обслуговування протягом встановленого періоду з моменту придбання. (Продукт: Обмежена гарантія: 3 роки обмеженої гарантії (Поширюється: Протягом 1 року на силові адаптери, джерела живлення і компоненти вентилятора охолодження) Повну версію гарантійних зобов'язань, а також права користувача та обмеження при експлуатації даного продукту дивіться на вебсайті TRENDnet.com.

Certifications

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received.
Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.

Note

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Advertencia

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

Technical Support

If you have any questions regarding the product installation, please contact our Technical Support.
Toll free US/Canada: 1-866-845-3673
Regional phone numbers available
at www.trendnet.com/support

Product Warranty Registration

Please take a moment to register your product online. Go to TRENDnet's website at:
<http://www.trendnet.com/register>

TRENDnet
20675 Manhattan Place, Torrance, CA 90501, USA
Copyright © 2014. All Rights Reserved. TRENDnet.