



## **TK-204K** **2-Port High Quality DVI KVM Switch w/Audio**

TRENDnet's TK-204K 2-port DVI-KVM encompasses all your multimedia and multi-tasking needs into one cost effective solution. Manage multiple PC's effectively while enjoy audio-rich features with one set of LCD monitor, keyboard, mouse, microphone, and speakers.



### **FEATURES**

- 2-Port DVI, PS/2 Audio KVM Switch with Enhanced Digital Video Support
- DVI-I (Digital & Analog) Interface Technology Supports Pure Digital Video Signal Transmission
- Compatible with DVI-D (Digital Only) Connector
- Supports Microsoft IntelliMouse, IntelliMouse Explorer, Logitech NetMouse and more
- Enhanced Digital Video Support up to 1600 x 1200 High VGA Resolution
- Direct Channel Selection and Operation using Push Buttons or Hot-Key Commands
- Auto-Scan Mode for monitoring PCs and Beeping Sound for Switching Confirmation
- Numerical LED Display for Easy Monitoring ( One 7-Segment LED)
- Share Audio and Microphone between Multimedia Pcs
- Supports DOC, Windows 95/98(SE)/ME/2000/XP, Linux and more
- Plug & Play and Hot-Pluggable
- 2-Year Warranty

### **BENEFITS**

- **Integration Friendly:**  
Does not require driver/software for the installation and operation. Switch between PCs with the push button or Hot-Key operation.
- **Flexible:**  
Hot-Plug feature, add PCs or remove connected PCs without powering off the KVM switch or the other PCs.
- **Cost Effective:**  
Manage two PCs with single keyboard, monitor, mouse and speakers/microphone. Save on equipment cost, utility, and space.
- **Performance:**  
Support High Digital Video Quality up to 1600 x 1200.



# TK-204K

## 2-Port High Quality DVI KVM Switch w/Audio

### SPECIFICATIONS

**Interface:**

- DVI-I & DVI-D Compliant

**PC Port Connector:**

- 2 x PS/2 Keyboard 6-pin Mini Din (Female)
- 2 x PS/2 Mouse 6-pin Mini Din (Female)
- 2 x DVI-I Single Link (Female)

**Console Ports Connector:**

- 1 x PS/2 Keyboard 6-pin Mini Din (Female)
- 1 x PS/2 Mouse 6-pin Mini Din (Female)
- 1 x DVI-I Single Link (Female)
- 1 x 3.5mm Audio in/out jack
- 1 x 3.5mm Microphone in/out jack

**PC Selection:**

- Push Buttons or Hot-Key Commands

**Keyboard/Mouse Emulation:**

- PS/2

**Cable:**

- 2 sets of DVI-I Dual Link KVM Cable (1.8m/6ft)

**To KVM**

- PS/2 Keyboard 6-pin Mini Din (Male)
- PS/2 Mouse 6-pin Mini Din (Male)
- DVI-I Dual Link (Male)

**To PC**

- PS/2 Keyboard 6-pin Mini Din (Male)
- PS/2 Mouse 6-pin Mini Din (Male)
- DVI-I Dual Link (Male)
- Audio connector (Male)
- Microphone connector (Male)

**Display Resolution:**

- 1600 x 1200

**Power:**

- 9V DC, 1A External Power Adapter

**Dimensions:**

- 140 x 86 x 45mm (5.5 x 3.4 x 1.8 inches)

**Weight:**

- 520 g (18.4 oz.)

**Temperature:**

- Operating: 0° ~ 40°C (32° ~ 104° F); Storage: -20° ~ 60°C (-4° ~ 140° F)

**Humidity:**


- 0%~90% RH, Non-Condensing

**Certifications:**

- FCC, CE



### NETWORKING SOLUTIONS

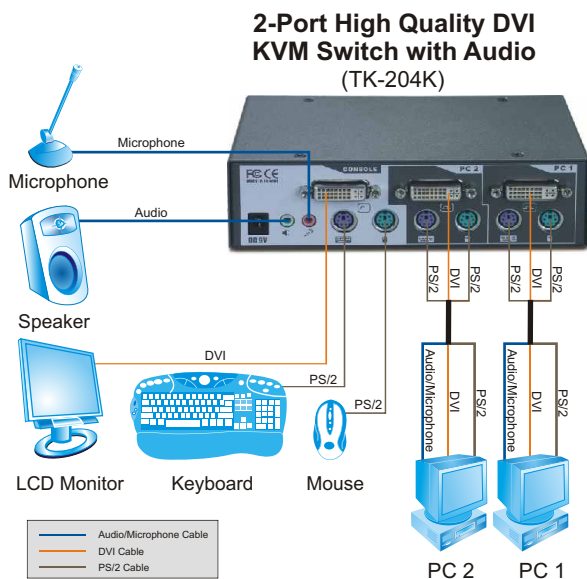

**To Order Please Call:**  
**1-888-326-6061**

### RELATED PRODUCT

---> **TK-404KR:** 4-Port Rack Mount DVI KVM Switch w/ Audio

### ORDERING INFORMATION

**TRENDware International, Inc.**

3135 Kashiwa Street  
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: [www.TRENDNET.com](http://www.TRENDNET.com)

Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA