



TU-P1284 **USB to Parallel 1284 Converter**

This USB to Parallel 1284 converter allows you to connect a parallel printer to a USB port on your desktop or laptop pc.



FEATURES

- Compliant with USB 1.1 Specifications
- Compliant with IEEE 1284 (Bi-Directional Parallel) Interface
- Supports Suspend/Normal Power Management Modes
- Supports Data Transfer Rate up to 12Mbps Speed
- Compliant with Windows 98(SE)/ME/2000/XP
- Eliminate Manual or Automatic Parallel Switch Boxes
- Supports Plug & Play and Easy Installation
- 2-Year Warranty



TU-P1284

USB to Parallel 1284 Converter

SPECIFICATIONS

Interface:

- USB 1.1 Interface Type A IEEE 1284 Centronics 36 Male

OS Compliant:

- Windows 98(SE)/ME/2000/XP

Cable Length:

- 2m/6.7ft.

Cable Gauge:

- 28/24 AWG

Data Rate

- 12Mbps

Power Consumption:

- 500mA (max)

Weight:

- 126g. (0.3 lb)

Operating Temperature:

- 0 ~ 40 C (32 ~ 104 F)

Storage Temperature:

- -10 ~ 45 C (14 ~ 113 F)

Humidity:

- 85% (Non-Condensing)


Certifications:

- FCC, CE



NETWORKING SOLUTIONS

USB TO PARALLEL 1284 CONVERTER (TU-P1284)

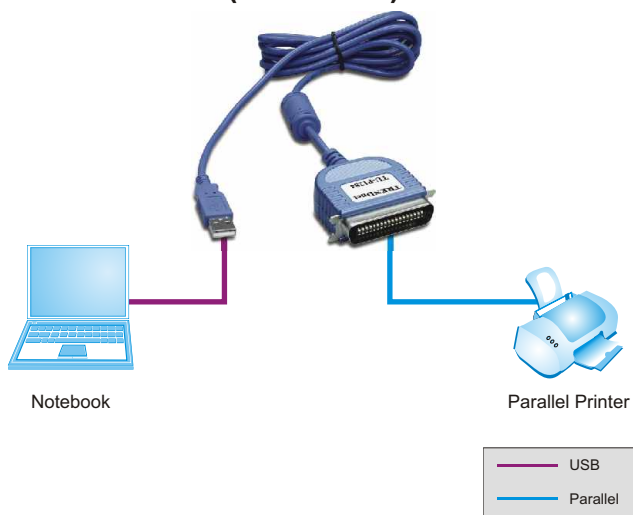

To Order Please Call:
1-888-326-6061

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA