




TW100-BRM504 4-Port ADSL Modem Firewall Router

TRENDnet's TW100-BRM504 includes an ADSL Modem, SPI Firewall, Router, and 4-Port Switch ALL-IN-ONE box. Simply plug it into your DSL phone line and you have a high-performance network for your home or small office. Security includes a Stateful Packet Inspection Firewall (SPI), Denial of Service Attack prevention, VPN pass-through, and advanced Rule-Based Firewall, while the Application Level Gateway (ALG) and Port Forwarding features add flexibility so designated programs such as gaming and web-conferencing programs can work around the Firewall. Control user Internet access via URL, time, and MAC address, while Logs and reports provide monitoring of intrusion attempts and traffic. Set-up is easy with UPnP support and a Quick Install Wizard.

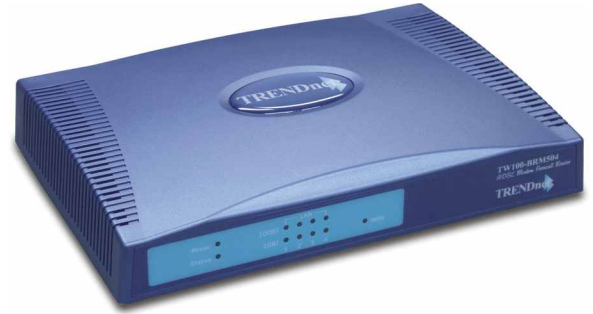

FEATURES

- Built-in 4-port 10/100Mbps Auto-Sensing Switch
- Supports most operating systems, such as Windows 95/98/ME/NT/2000/XP, Unix, and Mac
- Compliant with ITU-T G.dmt, G.lite and multi-mode for ADSL modems
- Support PPPoE, PPPoA and IPoA
- Website Access Control using URL Keywords and Services Types
- NAT/NAPT Firewall and Stateful Packet Inspection (SPI) to protect against DoS attacks
- Supports DMZ, Virtual Servers (Port Forwarding) and Firewall Rules
- Supports RIP/Static Routing and Dynamic DNS Service
- Supports 100 sessions of VPN Pass-Through for PPTP, IPSec and L2TP
- Real-Time e-mail alert and logs when attack/unauthorized Internet activity occurs
- DHCP Server supports up to 253 clients Supports UPnP (Universal Plug & Play) and ALGs
- Supports Internet applications such as Email, FTP, Gaming, ICQ, NetMeeting, PING, Telnet, and more
- Remote Management with HTTP/Web Browser (from LAN, WAN, or both)
- Easy Configuration using Web Browser
- Flash memory for firmware upgrade and save/restore router configuration
- 5-Year Warranty

BENEFITS

- **Easy Integration:**
With the built-in 4-port 10/100Mbps Switch, you can integrate this device to any Ethernet/Fast Ethernet Network.
- **Cost-Effectiveness:**
Share the broadband Internet connection, saves modem, router costs and account charges.
- **Security:**
Firewall protection keeps hackers out.
- **Performance:**
Experience the high speed Internet access while reducing network traffic.



TW100-BRM504

4-Port ADSL Modem Firewall Router

SPECIFICATIONS

Standards:

- IEEE 802.3(10Base-T), 802.3u (100Base-TX)

Protocols:

- NAT/NAPT, PPPoE & PPPoA, HTTP, DHCP (client/server), TCP/IP & UDP, PAP&CHAP, RIP1, DDNS, UPnP

Firewall:

- NAT firewall, Rule-Based Policy Firewall, Attack Alert (email) and log, Stateful Packet In-spection firewall for DoS (Denial of Service) Attacks

Security:

- URL Filter, Access Control, Local Password

ATM:

- Support AAL5, UBR, VPI Range (0 ~ 255) and VCI range (1 ~ 65535), 1 PVC, OAM F4/F5 loop back.

Payload Encapsulation:

- RFC2684 (RFC1483), Multi-Protocol over ATM; RFC2225 (RFC1577), IPoA
- RFC2364, PPP over ATM (CHAP&PAP); RFC2516, PPPoE over ATM

LAN Port:

- 4x 10/100Mbps Ethernet port (RJ45), Auto-MDIX

WAN Port:

- Compliant to G.dmt (G.922.1) Annex A
- Compliant to G.lite (G.922.1) and T1.413 Annex A
- ADSL Line Interface (RJ11)

Line Impedance:

- 100 Ω ; Automatic-Rate Adaptation in step of 32Kbps

LEDs:

- Power, Status, 10/100 (LAN 1~4), WAN

Power:

- 15V DC 1A External Power Adapter

Dimensions (LxWxH):

- 183 x 125 x 31 mm (7.2 x 4.9 x 1.2 inches)

Unit Weight:

- Appr. 408 g (0.9 lb)

Temperature:

- Operating: 0° ~ 40° C (32° ~ 104° F)
- Storage: -20° ~ 70° C (-4° ~ 158° F)

Humidity:


- Operating: 10 ~ 90% RH
- Storage: 5 ~ 95% RH

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

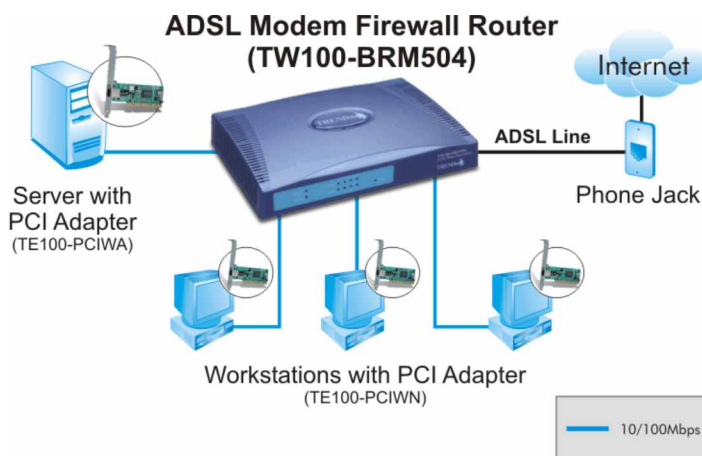

To Order Please Call:
1-888-326-6061

RELATED PRODUCT

- ➔ TW100-BRM504:
4-Port ADSL Modem Firewall Router
- ➔ TW100-BRF114:
Cable/DSL 4-Port Firewall Router
- ➔ TW100-BRV204:
Cable/DSL VPN Firewall Router
- ➔ TW100-BRV304:
Cable/DSL Advanced VPN Firewall Router
- ➔ TW100-S4W1CA:
10/100Mbps DSL/Cable Broadband Router /w 4-port Switch

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

