



### **USB to Serial Converter**

#### TU-S9 (v3.2R)


- Connect a RS-232 serial device such as a modem to a USB port on your computer
- Easy installation
- Supports USB 1.1 and compatible with USB 2.0 and USB 3.0 ports
- ${\ensuremath{\cdot}}\xspace$  Supports Windows  ${\ensuremath{^{\ensuremath{\mathbb{R}}}}\xspace}$  and  $\ensuremath{\mathsf{Mac}}\xspace^{\ensuremath{\mathbb{R}}}$  operating systems

TRENDnet's USB to Serial Converter, model TU-S9, allows users to conveniently connect an RS-232 serial device, such as a modem or printer, to a USB port on your desktop PC or laptop. The USB to serial adapter supports both Windows<sup>®</sup> and Mac<sup>®</sup> operating systems. Integrated cables provide setup flexibility and accommodates most installation scenarios.





USB The USB to serial adapter supports USB 1.1 and it is compatible with USB 2.0 and USB 3.0 ports.




RS-232 Serial Connector Connect RS-232 serial devices, such as

using the widely supported USB standard found in most laptops and desktops today.



Flexible Cable Integrated and flexible 540mm (21 in.) USB cable accommodates most installation scenarios.

### **NETWORKING SOLUTION**

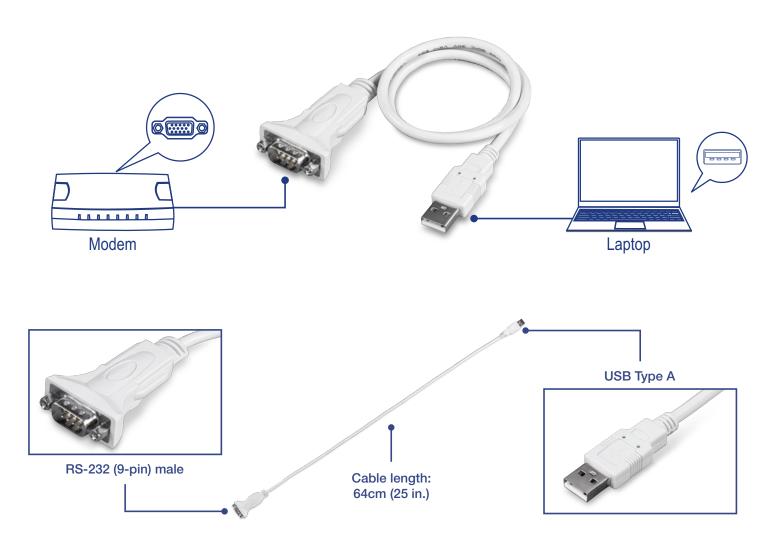

# TRENDNET

## FEATURES



Easy Setup Simple installation in seconds

### **SPECIFICATIONS**

#### Standards

• USB 1.1

#### Interface

- 1 x USB Type A
- 1 x RS-232 (9-pin) male
- Cable length: 64cm (25 in.)

#### Data Rate

• Up to 6Mbps

#### Supported OS

- Windows<sup>®</sup> 10, 8.1, 8, 7
- Mac OS<sup>®</sup> 10.11, 10.10, 10.9, 10.8, 10.7, 10.6



#### **Computer Connection**

Integrated and flexible 540mm (21 in.) USB cable accommodates most installation scenarios

#### **Operating Temperature**

• 0° – 40° C (32° – 104° F)

#### **Operating Humidity**

Max. 85% non-condensing

#### Power

• USB powered

#### **Power Consumption**

• 500mA (max.)

#### Dimensions

- RS-232 connector: 65 x 35 x 10 mm (2.55 x 1.4 x 0.4 in.)
- Total cable length: 64cm (25 in.)

# OS (

#### **Operating Systems**

The USB to serial adapter is compatible with Windows<sup>®</sup> and Mac<sup>®</sup> operating systems

- Weight
- 50g (1.7 oz.)

#### Certifications

- CE
- FCC

#### Warranty

2 year

#### Package Contents

- TU-S9
- Quick Installation Guide
- CD-ROM (Drivers)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.