

USB 2.0 to SATA / IDE Converter TU2-IDSA (V1.2R)

The USB 2.0 to SATA / IDE Converter allows users to use IDE or SATA hard drives over a USB 2.0 connection. It works with most IDE (up to ATA 133) and SATA 1.0a devices. This device provides a simple, yet powerful data transfer and backup solution.

PRODUCT OVERVIEW

- Connect a SATA or IDE hard drive to your computer
- Connect your hard drive and plug the adapter in to any USB port on your PC
- Works with CD-ROM, DVD-ROM and hard drive devices

FEATURES

- Compliant with USB 2.0 and SATA (Serial ATA) 1.0a specifications
- Compliant with USB Mass Storage Class Bulk-Only Transport specification
- Supports combo connectors IDE (40pin & 44pin) for 2.5" / 3.5" / 5.5" IDE & SATA devices
- Turns an internal IDE / SATA hard drive or CD/DVD-ROM into an external USB device
- Operates IDE and SATA devices simultaneously
- Compliant with Windows 8, Windows 7 (32/64-bit), Vista (32/64-bit), 2003 Server, XP (32/64-bit), 2000, ME, 98SE and Mac OS X 10.1~10.7
- Plug & play for easy Installation
- 2-year limited warranty

USB 2.0 to SATA / IDE Converter

TU2-IDSA (v1.0R)




SPECIFICATIONS

HARDWARE

Interface	<ul style="list-style-type: none">• USB 2.0, 1.1• Serial ATA 1.0a (Serial ATA)• Ultra ATA 133 (Parallel ATA)
Supported OS	<ul style="list-style-type: none">• Windows 8, Windows 7 (32/64-bit), Vista(32/64-bit), 2003 Server, XP (32/64-bit), 2000, ME, 98SE• Mac OS X 10.1 ~ 10.7
Connectors	<ul style="list-style-type: none">• SATA: 7-pin signal male• IDE: IDE 44-pin female• IDE 2.5" to 3.5" Converter: IDE 44-pin male to 40-pin female• USB: USB 2.0 type A male• DC: Mini 4-pin power connector• DC In: 2.1mm power plug
Data Rate	<ul style="list-style-type: none">• 1.5/12/480 Mbps (USB)
Power	<ul style="list-style-type: none">• Input: AC 100~240V• Output: 12V DC, 2A
Weight	<ul style="list-style-type: none">• Adapter: 70g (2.5 oz.)• Power Supply: 240g (8.5 oz.)
Operating Temperature	<ul style="list-style-type: none">• 0°C~ 40°C (32°F~ 104°F)
Humidity	<ul style="list-style-type: none">• Max 85% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC

NETWORKING SOLUTIONS

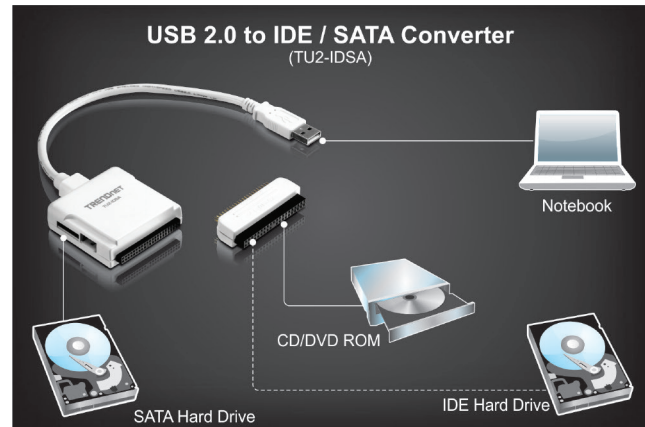

PACKAGE CONTENTS

TU2-IDSA

Quick Installation Guide

Serial ATA Cable

Hard Drive Power Cable

2.5" to 3.5" IDE Converter

AC / DC Power Supply

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

