







2-Port 10/100Mbps Multi-Function USB 2.0 **Print Server**

TE100-MP2U

The 2-Port 10/100Mbps Multi-Function USB 2.0 Print Server (TE100-MP2U) is designed to transform virtually any stand-alone multi-function USB printer into a shared resource on your network. An intuitive utility application and a user-friendly configuration interface provides a seamless user experience. LED indicators, bidirectional support and e-mail notifications allow for easy management. With support for most operating systems, simply connect up to two devices to this product for instant multimedia and file sharing. This product offers a cost effective solution to the challenge of sharing multi-function printer, fax, scanner and storage devices.

- FEATURES Compliant with USB 2.0 high speed printing
 - Supports most USB printers and all-in-one multi-function printers *
 - One USB 2.0 port and one RJ-45 10/100Mbps auto-negotiation fast Ethernet port
 - TCP/IP protocol supports DHCP, SNMP, UPnP, FTP
 - Provides two type of storage access modes: netusb mode and server mode
 - · Supports USB storage devices such as hard drives, flash drives and memory card readers.
 - · Supports auto-connect for printing and scanning
 - Email notification for adding/removing USB devices or system error messages
 - Compliant with Windows 2000/XP/2003 Server/Vista (32-Bit) operating systems
 - Windows based utility program and Web based configuration
 - · Built-in flash memory for easy firmware upgrade
 - 5 year limited warranty

2-Port 10/100Mbps Multi-Function USB 2.0 Print Server TE100-MP2U


SPECIFICATIONS

Hardware	
Standard	 IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX
Printer Interface	USB 2.0, 1 1 compliant USB type A port
LAN Port	10/100Mbps auto-negotiation UTP/STP Ethernet port
CPU/ SDRAM / Flash ROM	• RDC R3210-G 150MHz / 8MB / 2MB
USB Storage	NetUSB mode: single-user access, FAT12/16/32 (read/write) and NTFS (read/write)
	Server mode (FTP/SMB server): multi-user access. FAT12/16/32 (read/write) and NTFS (read)
Diagnostic LEDs	Power, link, status, USB1, USB2
TCP/IP Protocol Supported	DHCP, SNMP, UPnP, FTP
Transport Protocol	• TCP/IP
Supported OS	Windows 2000/XP/2003 Server/Vista (32-Bit)
Management	Windows based utility or Web based configuration
Power	12V DC 1A external switching power adapter
Power Consumption	Max: 2.5W (without a peripheral)
Weights	• 95g (3.35oz.)
Product Dimensions (W x H x D)	• 101 x 70 x 26mm (3.98 x 2.76 x 1.02 in.)
Temperature	• Operating: 0°C ~ 50°C (32°F ~ 122°F); Storage: -25°~55°C (-13°~131°F)
Humidity	• 10%~90% (non-condensing)
Certification	• CE, FCC

NETWORKING SOLUTIONS

2-Port 10/100Mbps Multi-Function USB 2.0 Print Server

(TE100-MP2U)

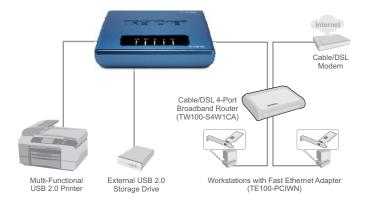

PACKAGE CONTENTS

- TE100-MP2U
- · Multi-language quick installation guide
- Utility CD-ROM
- Switching power adapter (12V DC, 1A)

RELATED PRODUCTS

TE100-P1U	10/100Mbps USB 2.0 Print Server
TE100-MP1U	1-Port 10/100Mbps Multi-Function USB 2.0 Print Server
TEW-MP2U	54Mbps 802.11g Wireless 2-Port Multi-Function USB 2.0 Print Server

ORDERING INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: <u>www.trendnet.com</u> Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

