



54Mbps 802.11a/b/g Wireless USB 2.0 Adapter with HotSpot Detector

TEW-509UB

The 802.11a/g Wireless USB 2.0 adapter combines features from Wi-Fi detectors and standard 802.11a/g wireless adapter to deliver the perfect solution for mobile users. It has built-in LCD display helps you determine an access point's security scheme (WPA, WEP), signal strength, and wireless standard (802.11a, 802.11b or 802.11g) without turning on your laptop!

FEATURES

- Wi-Fi Compliant with IEEE 802.11g and IEEE 802.11b Standards
- Detects IEEE 802.11a, 802.11b, and 802.11g HotSpots• Connects to IEEE 802.11a, 802.11b or 802.11g Wi-Fi Devices
- Supports Ad-Hoc (Peer-to-Peer) Mode or Infrastructure (AP-Client) Mode
- Dynamic Data Rate Scaling at 54, 48, 36, 24, 18, 12, 9 and 6Mbps for 802.11a/g
- Dynamic Data Rate Scaling at 11, 5.5, 2 and 1Mbps for 802.11b
- Built-in Rechargeable Li-ion Battery (Automatically charge when connected to the USB port)
- Hotspot Finder displays SSID, Channel, Security Enable/Disable and Signal Strength information
- Supports Custom Search by Signal Strength, SSID or Encryption
- Maximum Reliability, Throughput and Connectivity with Automatic Data Rate Switching
- Supports 64/128-bit WEP, WPA and WPA-PSK without Performance Degradation
- Low Interference and High Susceptibility Guarantee Reliable Performance
- Compatible with Windows 98SE/ME2000/XP (SP1/SP2)/2003 Server
- Range of 35~100 meters indoor, 100~300 meters outdoor (depends on the environment)
- Simple User Setup & Diagnostics Utilities
- 3-Year Warranty


Note: Coverage and Speed performance might vary depending on the network environment.

54Mbps 802.11a/b/g Wireless USB 2.0 Adapter with HotSpot Detector TEW-509UB

SPECIFICATIONS

Hardware	
Interface	• USB 2.0, 1.1 Compliant
LCD / LED	• 96 x 32 pixels / PWR, ACT
Control	• Power On/Off, Scan, Next
Battery/Consumption	• 160mAh, 3.7V / 430mA
Dimensions (LxWxH)	• 97.3 x 28.6 x 14 mm (3.8 x 1.1 x 0.6 inches)
Weight	• 35g (1.2 oz.)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -20° ~ 70° C (-4 ~ 158 F)°
Humidity	• 10% ~ 90%max (Non-condensing)
Safety Emission	• FCC, CE
Wireless	
Module Technique	• 802.11a: OFDM with BPSK, SPSK, 16/64 QAM sub-carrier • 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM with BPSK, SPSK, 16/64 QAM sub-carrier
Frequency	• 802.11a: 4.920 ~ 5.825 GHz • 802.11b/g: 2.412 ~ 2.484 GHz
Media Access Protocol	• CSMA/CA
Transmit Power	• 802.11a: 13dBm @54Mbps, 14dBm @48Mbps, 15dBm @36Mbps, 16dBm @6~24Mbps • 802.11b: 18dBm @11Mbps • 802.11g: 15dBm @54Mbps, 16dBm @48Mbps, 17dBm @6~36Mbps
Receiving Sensitivity	• 802.11a: 54Mbps 10 ⁻⁵ BER @ -71dBm • 802.11b: 11Mbps 10 ⁻⁵ BER @ -87dBm • 802.11g: 54Mbps 10 ⁻⁵ BER @ -72dBm
Encryption	• 64/128-bit WEP (Hex or ASCII), WPA, and WPA-PSK
Channels	• 802.11a: Subject to Local Regulations • 802.11b/g: 1~11 (US), 1~13 (EU)

NETWORKING SOLUTIONS

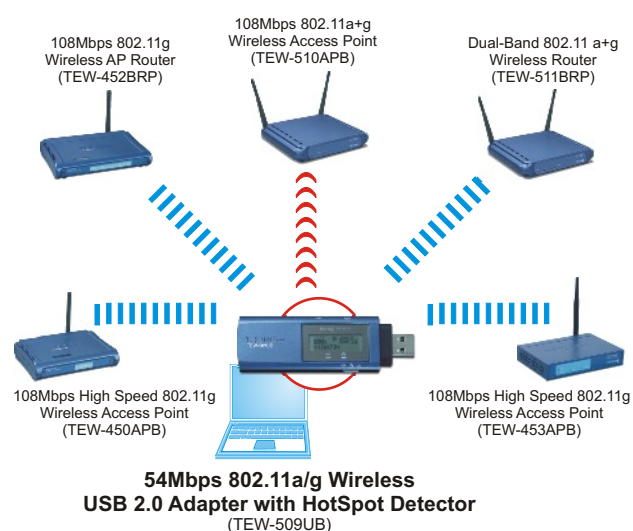

*Laptop/PC is not required to detect HotSpots



PACKAGE CONTENTS

- TEW-509UB
- Utility & Driver CD-ROM
- Multi-Language Quick Installation Guide

RELATED PRODUCTS

TEW-501PC	108Mbps 802.11a/g Wireless CardBus PC Card
TEW-503PI	108Mbps 802.11a/g Wireless PCI Adapter
TEW-510APB	108Mbps 802.11a/g Wireless Access Point

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

