




# 5-Port Gigabit PoE+ Switch

## TPE-TG50g (v2.4R)

- 4 x Gigabit PoE+ ports
- 1 x Gigabit port
- 31W PoE power budget
- 10Gbps switching capacity
- · Compact metal switch
- Lifetime Warranty

TRENDnet's 5-Port Gigabit PoE+ Switch, model TPE-TG50g, delivers data and power over existing Ethernet cables to Power over Ethernet (PoE) devices, such as access points and IP cameras. It supports both PoE and PoE+ devices with a 31W PoE power budget. Easily install this compact sturdy metal switch for reliable high-speed PoE networking.









### **PoE Power**

A 31W PoE power budget supplies up to four Power over Ethernet devices, such as access points and IP cameras.


## **Gigabit Ethernet**

Five gigabit ports provide a 10Gbps switching capacity to support edge network installations.


### **Compact Design**

The compact and lightweight housing is well-suited for desktop installations, and the fanless design is perfect for quiet environments.

## **NETWORKING SOLUTION**

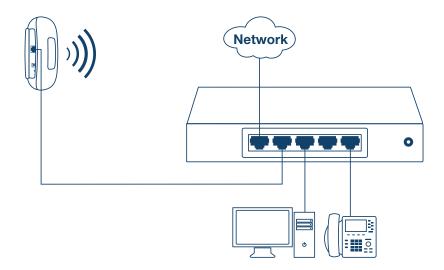



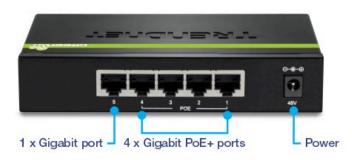



## **FEATURES**



### PoE

Supports both PoE (802.3af) and PoE+ (802.3at) devices with a 31W PoE power budget



### **Ports**

Four gigabit PoE+ ports and one gigabit port



### **Switching Capacity**

10Gbps switching capacity



### **Fanless**

Fanless design is ideal for quiet environments that require silent operation, and reduces energy consumption



### **Compact Design**

With a compact and lightweight housing design, this switch is wellsuited for desktop installations



### **Jumbo Frame**

Sends larger packets, or Jumbo Frames (up to 9KB), for increased performance



### **Energy Savings**

Embedded GREENnet technology reduces power consumption



### Housing

Wall mountable rugged metal housing



### **LED Indicators**

LED indicators convey port status

## **SPECIFICATIONS**

#### **Standards**

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab
- IEEE 802.3af
- IEEE 802.3at
- IEEE 802.3az

### **Device Interface**

- 4 x Gigabit PoE/PoE+ ports
- 1 x Gigabit port
- LED indicators

### **Data Transfer Rate**

- Ethernet: 10 Mbps (half duplex), 20 Mbps (full duplex)
- Fast Ethernet: 100 Mbps (half duplex), 200 Mbps (full duplex)
- Gigabit: 2000 Mbps (full duplex)

#### Performance

Packet Buffer: 1MbSwitch Fabric: 10Gbps

• MAC Address Table: 2K entries

Forwarding rate: 7.44Mpps (64-byte packet size)

· Jumbo Frame: 16K

### Power

Input: 110 -240 V AC, 50/60 Hz, 1.2A

Output: 54V DC, 0.7A

Max. consumption: 37.5W

### PoE

• PoE budget: 31W

• PoE Mode A: Pins 1, 2, 3, and 6 for power

### **Operating Temperature**

• 0° - 40° C (32° - 104° F)

### **Operating Humidity**

• Max. 90% non-condensing

### **Dimensions**

• 148 x 95 x 26mm (5.8 x 3.7 x 1 in.)

### Weight

• 371g (13 oz.)

### Certifications

- CE
- FCC

### Warranty

3 Lifetime Warranty

### **Package Contents**

- TPE-TG50g
- Quick Installation Guide
- Power adapter (54V DC, 0.7A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

TRENDnet offers a lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty.