





TRENDnet 2.5G PoE++ Injector, TPE-219GI, 90W PoE++, 30W PoE+, 15.4W PoE, IEEE 802.3bt /802.3at/802.3af Compliant, Metal Housing, Up to 100m (328 ft.), Black

TPE-219GI (v1.0R)

- **DEVICE INTERFACE:** 1 x 2.5G RJ-45 port (data); 1 x 2.5G RJ-45 PoE++ port (data + power out); Metal Housing; Integrated Power Supply
- **POE++ POWER:** The 2.5G PoE++ injector supplies a PoE device with PoE (15.4W), PoE+ (30W), or PoE++ (90W) power
- **2.5 GIGABIT SPEEDS:** Equipped with a 2.5GBASE-T RJ-45 port that converts a non-PoE port to a PoE++ Port providing network speeds of up to 2.5Gbps over existing Cat5e or better cabling.
- **AUTO SENSING TECHNOLOGY:** Featuring auto-sensing technology that conveniently delivers the correct wattage needed to power your PoE, PoE+, and PoE++ devices.
- **POE DISTANCE:** Connect the 2.5G PoE++ injector to a non-PoE switch, and run an Ethernet cable with data + power to network a PoE, PoE+ or PoE++ device up to 100 meters (328 ft.) away
- **EASY INSTALLATION:** Simply connect the 2.5G PoE++ injector to your switch and PoE device – no configuration needed
- **INSTALLATION FLEXIBILITY:** The wall-mount designed PoE++ injector has a sturdy metal enclosure that accommodates most installations scenarios.
- IEEE 802.3af, 802.3at, and 802.3bt compliant

TRENDnet's 2.5G PoE++ Injector, model TPE-219GI, combines electrical power with a 2.5GBASE-T network connection to produce an ultra-fast 2.5G PoE++ network signal. Auto-sensing technology conveniently delivers the correct wattage needed to power your PoE++ devices. Connect the TPE-219GI 2.5G PoE++ injector to a non-PoE switch, and run an Ethernet cable with data + power to network a PoE++ device up to 100 meters (328 ft.) away. Network PoE devices such as wireless access points, IP cameras, VoIP phone systems, IPTV decoders, access controls, and more.

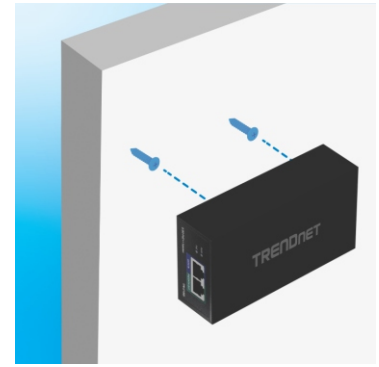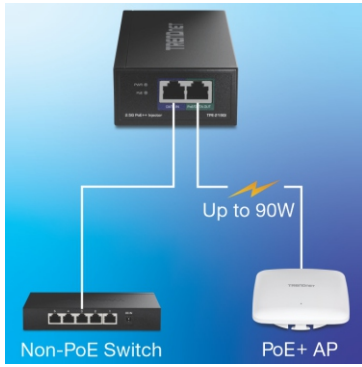

PoE++

The 2.5G PoE++ injector supplies a PoE device with PoE (15.4W), PoE+ (30W), or PoE++ (90W) power.


2.5G Speeds

Equipped with a 2.5GBASE-T RJ-45 port providing network speeds of up to 2.5Gbps over existing Cat5e or better cabling.

Installation Flexibility

Wall-mount design and a sturdy metal enclosure accommodates most installations scenarios.

NETWORKING SOLUTION

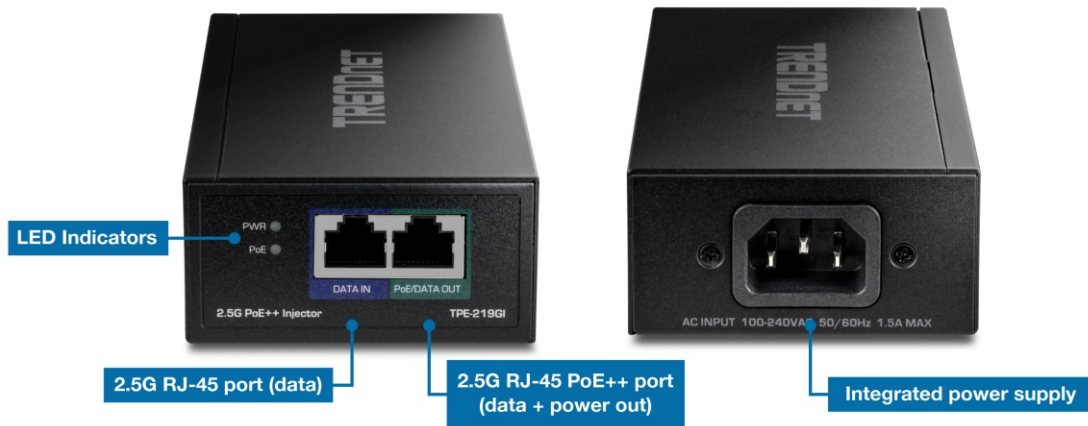

FEATURES



PoE++

Acting as a PoE++ adapter, the 2.5G PoE++ injector supplies a PoE device with PoE (15.4W), PoE+ (30W), or PoE++ (90W) power



Easy Installation

Simply connect the 2.5G PoE++ injector to your switch and PoE device – no configuration needed



Installation Flexibility

Wall-mount design and a sturdy metal housing accommodates most installations scenarios



2.5G Ports

1 x 2.5G port (data) and 1 x 2.5G PoE++ port (data + power out)



PoE Distance

Provides a PoE++ network connection up to 100m (328 ft.)



LED Indicators

LED indicators convey 2.5G PoE++ injector network connectivity



Auto-Sensing Technology

Featuring auto-sensing technology, the 2.5G PoE++ injector conveniently delivers the correct wattage needed to power your PoE, PoE+, or PoE++ devices

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3af
- IEEE 802.3at
- IEEE 802.3bt
- IEEE 802.3bz

Device Interface

- 1 x 2.5G RJ-45 port (data)
- 1 x 2.5G RJ-45 PoE++ port (data + power out)

PoE Budget

- Max. 90W

Power Consumption

- Max. 1.32W (without PD)
- Max. 95W (with PD)

Operating Temperature

- 0° – 40° C (32° – 104° F)

Operating Humidity

- Max. 90% non-condensing

Certifications

- CE
- FCC
- ETL

Dimensions

- 154 x 73 x 36mm (6 x 2.9 x 1.4 in.)

Weight

- 386g (0.85 lbs.)

Warranty

- 3 year

Package Contents

- TPE-219GI
- Quick Installation Guide
- Power cord

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.